



Digital Music Library


N1

N5

User Manual

This user manual uses sample screenshots captured on firmware version 1.10. Depending on the firmware version that is installed on your Digital Music Library, functions described and screenshots contained in the user manual may appear differently, so functions on your product may not work as described in the user manual. Always update the firmware to the latest version. The version of the firmware installed will show up during startup, or you can check it by opening the main menu and scrolling to the "System Update" option.

For the procedure of updating the firmware to the latest version, refer to the ["Updating the Firmware"](#) section in chapter 4.

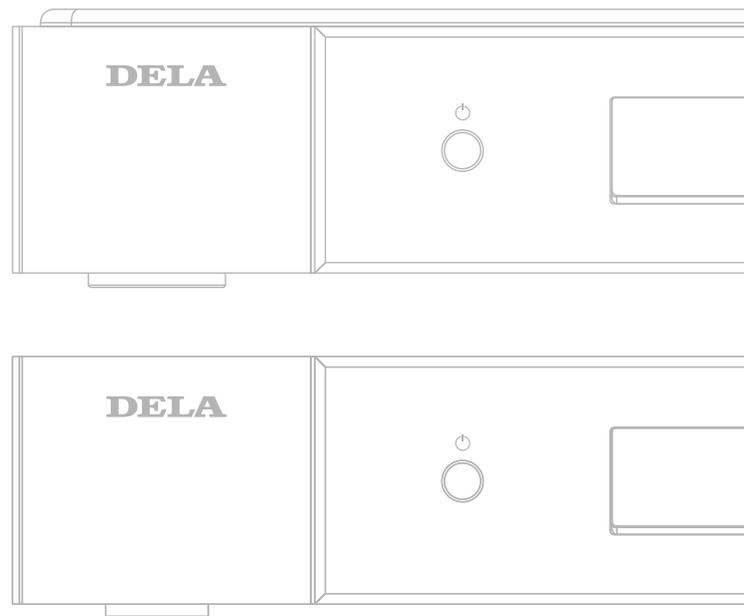

Please make sure to read this user manual before using and follow the procedures. If you have any inquiries about the product, contact us via the website on the warranty statement. Do not discard any included documents, the warranty statement, or the packing box.

Table of Contents

Chapter 1 Notice	5
Regulatory Compliance Information.....	5
Warning Symbols and Graphical Icons on the Product.....	6
Safety Precautions	6
Chapter 2 Getting Started	7
Summary of User Manual	7
Chapter 3 Basic Usage	8
Diagrams.....	8
Display	12
Home Screen	12
Menu	14
Dialog.....	14
Streaming Screen.....	14
Remotely Operating the Digital Music Library.....	16
Switching Between the Internal or External Clock Generator to the N1	17
Importing Music Files	18
Importing from USB Drives.....	18
Importing from a Music CD	19
Importing Files from a Computer	21
Confirming Imported Files	25
Downloading Music Files from Streaming Sites	26
Adding Accounts.....	27

Enabling or Disabling Periodic Downloads	29
Deleting Accounts.....	30
Playing Music Files on a Network Audio Player	32
Streaming Imported Music Files.....	32
Playing Music Files on USB-DAC Devices	33
Playing Music Files on the Digital Music Library or a USB Drive.....	33
Playing a CD Using an Optical Drive.....	35
Music Playback Operations.....	35
Configuring the Mode for Managing USB-DAC Using Controller App	36
Changing the DSD Playback Mode.....	39
Backing Up and Restoring	41
Backup Operations	41
Backing Up Data	42
Restoring Data	44
Deleting the Imported Music Files.....	46
Deleting All Files	46
Deleting Each File One by One.....	46
<u>Chapter 4 Advanced Usage.....</u>	<u>47</u>
Using a USB Drive as an Expansion Drive.....	47
Connecting a USB Drive as an Expansion Drive	47
Importing Music Files to an Expansion Drive	47
Streaming Music Files from Expansion Drives	48
Disconnecting an Expansion Drive.....	48
Formatting Drives	48
Formatting Internal Drives.....	48
Formatting Connected USB Drives.....	50
Erasing Data on the Digital Music Library Completely	51

Changing the IP Address	53
Changing the Friendly Name (Hostname).....	54
Configuring the Date and Time.....	56
Changing the Time Zone	57
Configuring Display and LED Settings	59
Changing the Display Brightness	59
Changing the Power LED Brightness.....	60
Configuring Automatic Power-Off.....	61
Changing the Display Language.....	62
Updating the Firmware.....	63
Updating via the Network.....	63
Updating from the USB Device	63
Checking for Updates Automatically	65
Restoring Factory Defaults.....	66
DELA Intelligent Music Library	67
SongKong for DELA Lite Music Tagger.....	67
MinimServer	68

Chapter 5 Appendix **69**

Menu List	69
Status	69
Browse Songs/Play Songs	69
Backup	69
Settings.....	70
Dismount USB Drive	74
Always use USB 2.0/USB 3.0 as Expansion	74
System Update	74

Language	74
Support	75
Error Codes	75
Default Settings	77

Chapter 1 Notice

Regulatory Compliance Information

For Customers in the United States

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

For Customers in Canada

CAN ICES-003 (A)/NMB-003 (A)

For Customers in Europe and the United Kingdom

Warning: This is a class A product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

This product may cause interference if used in residential areas. Such use must be avoided unless the user takes special measures to reduce electromagnetic emissions to prevent interference to the reception of radio and television broadcasts.

Environmental Information



- The equipment that you have purchased has required the extraction and use of natural resources for its production.
- The equipment may contain hazardous substances that could impact health and the environment.
- In order to prevent the dissemination of those substances into the environment, and to relieve pressure on natural resources, we encourage you to seek out an appropriate take-back program. Take-back programs will reuse or recycle materials of any end-of-life equipment in a responsible way.
- Products with the crossed-out wheeled-bin symbol above should not be recycled. Instead, seek out a take-back program as mentioned.
- If you need more information on the collection, reuse, and recycling of our end-of-life products, please contact your local or regional waste administration.

Warning Symbols and Graphical Icons on the Product

Warning symbols are used on the product for safety operation and prevention of injury to you and damage to the unit. The following explains the meanings of symbols used on the product.

	This symbol indicates important warnings or cautions for operation and maintenance. Additional information will follow this symbol.
	This symbol indicates the presence of an alternating current.
	This symbol indicates danger of hazardous high voltage.


Safety Precautions

Before using your device, basic safety instructions should always be followed.

- (1) Read these instructions.
- (2) Keep these instructions.
- (3) Heed all warnings and follow all instructions.
- (4) The socket-outlet shall be installed near the equipment and shall be easily accessible.
- (5) Only use the cables and accessories that are included in the package. Don't use other accessories or cables unless specifically instructed to in the documentation. Also, do not use USB cables that are 3 meters or longer to connect USB devices.
- (6)  **Caution:** Do not remove the cover.

Chapter 2 Getting Started


Summary of User Manual

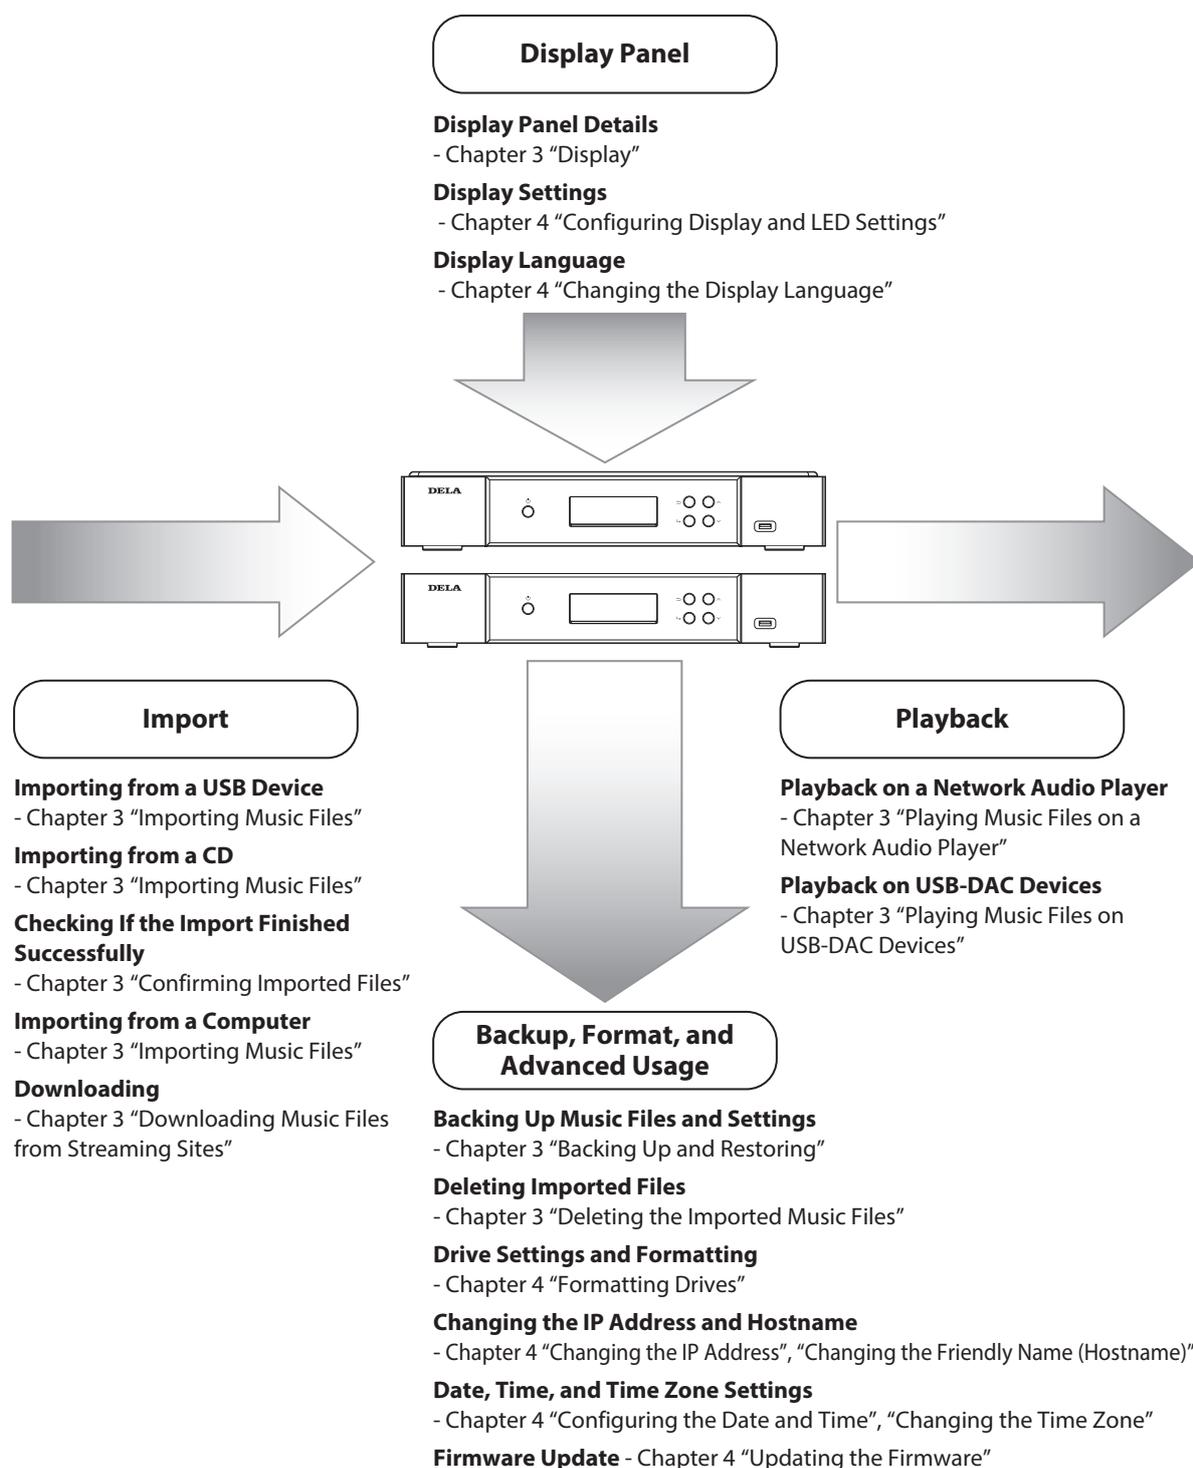

Chapter 3 Basic Usage

Diagrams

N1

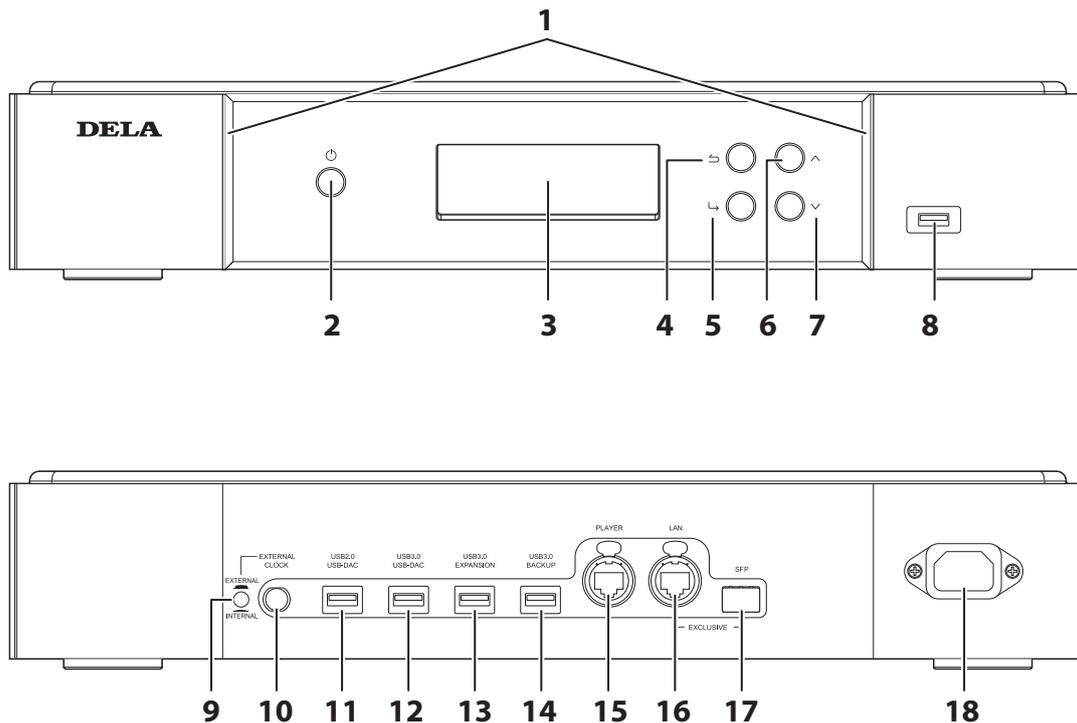

1 Power LED

While the Digital Music Library is powered on, the LED will glow blue. It will extinguish when powering off.

Note: The brightness of the power LED can be changed from *Settings > Display > Power LED Brightness*.

2 Power Button (⏻)

To turn the power on, press the button. To turn the power off, press and hold down the button.

3 Display

Displays the device's status and settings menu. In case of an error, displays the error code and message.

Note: The brightness of the display panel can be changed from *Settings > Display > Brightness*. If the display brightness is set to *Dark Mode*, the display panel will be turned off.

4 Back Button (⏪)

Press this button to return the menu to the previous screen. If you press and hold this button for 2 seconds while at the home screen, the display panel will be turned off.

5 Menu/Enter Button (↵)

Press to make a selection on the display panel.

6 Up Button (^)

Press this button to scroll up.

7 Down Button (v)

Press this button to scroll down.

To initialize settings, press the power button while holding down this button.

8 USB 3.0 Port*

Connect a compatible USB hard drive or optical drive for music playback, or a USB flash drive for updating the firmware.

9 Clock Generator Select Button

Press to enable the external clock generator. Refer to the [“Switching Between the Internal or External Clock Generator to the N1”](#) section in chapter 3 for more detailed information on how to enable the external clock generator.



Before pressing this button, you will need to power off the Digital Music Library first as stated in the section mentioned above. If you do not follow the procedure, the Digital Music Library may stop working, and malfunction of the unit may also result.

10 Connector for External Clock Generator

Connect an external clock generator. Refer to the [“Switching Between the Internal or External Clock Generator to the N1”](#) section in chapter 3 for more detailed information on how to connect the external clock generator.



Before connecting or disconnecting the external clock generator, you will need to power off the Digital Music Library first as stated in the section mentioned above. If you do not follow the procedure, the Digital Music Library may stop working, and malfunction of the unit may also result.

11 USB 2.0 Port for USB-DAC

Use this port to connect a USB-DAC device.

12 USB 3.0 Port for USB-DAC

Use this port to connect a USB-DAC device.

13 USB 3.0 Port for Expansion USB Drive*

Connect a compatible USB hard drive to expand the Digital Music Library’s storage capacity.

14 USB 3.0 Port for Backup USB Drive*

Connect a compatible USB hard drive to back up or restore the data or settings of the Digital Music Library.

15 Ethernet Port for Player

This is a dedicated port for Network Audio Players. Use an Ethernet cable to connect a Network Audio Player or AV receiver directly to this port.

Note: If your Network Audio Player is directly connected to the Player port, it will not be visible on the network when the Digital Music Library is powered off. If this will be an issue, connect your Network Audio Player to the router or switch instead.

16 Ethernet Port for Router or Hub

Use an Ethernet cable to connect a wireless router, hub, or switch on your network to this port. Then you will be able to access the Digital Music Library from computers and mobile devices on your network.


17 SFP Port

This port can be used instead of the LAN port (the Ethernet port for router or hub) by using an SFP module (not included). Use only the supported SFP modules listed on dela.global.

18 Power Connector

Use the included power cable.

*Only the first partition of a connected USB drive is mounted. Additional partitions are not recognized. To utilize the capacity of the whole drive, connect the USB device to the Expansion or Backup port; navigate to *Settings > Drive*, select *Format USB Drive*, then select *Erase All Data* to format all partitions. Please note that all data currently on the drive will be deleted with this operation.

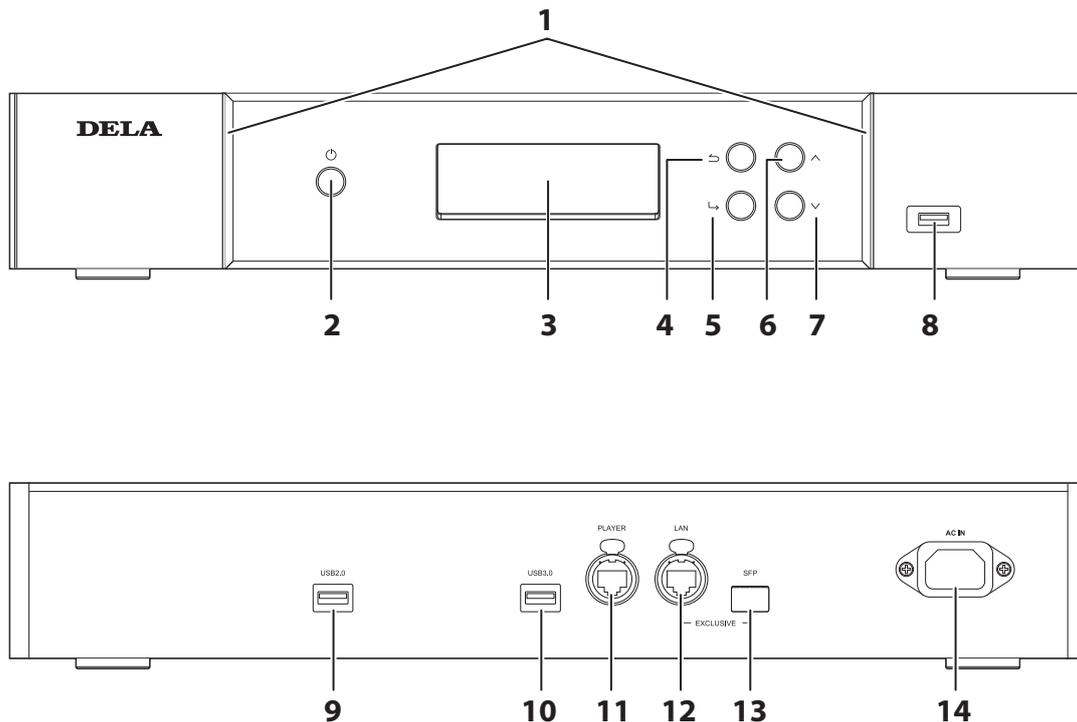N5**1** Power LED

While the Digital Music Library is powered on, the LED will glow blue. It will extinguish when powering off.

Note: The brightness of the power LED can be changed from *Settings > Display > Power LED Brightness*.

2 Power Button (⏻)

To turn the power on, press the button. To turn the power off, press and hold down the button.

3 Display

Displays the device's status and settings menu. In case of an error, displays the error code and message.

Note: The brightness of the display panel can be changed from *Settings > Display > Brightness*. If the display brightness is set to *Dark Mode*, the display panel will be turned off.

4 Back Button (⏪)

Press this button to return the menu to the previous screen. If you press and hold this button for 2 seconds while at the home screen, the display panel will be turned off.

5 Menu/Enter Button (⏩)

Press to make a selection on the display panel.

6 Up Button (^)

Press this button to scroll up.

7 Down Button (v)

Press this button to scroll down.

To initialize settings, press the power button while holding down this button.

8 USB 3.0 Port*

Connect a compatible USB hard drive, an optical drive for music playback, a USB-DAC device, or a USB flash drive for updating the firmware.

9 USB 2.0 Port

Connect a compatible USB hard drive, an optical drive for music playback, a USB-DAC device, or a USB flash drive for updating the firmware.

10 USB 3.0 Port

Connect a compatible USB hard drive, an optical drive for music playback, a USB-DAC device, or a USB flash drive for updating the firmware.

11 Ethernet Port for Player

This is a dedicated port for Network Audio Players. Use an Ethernet cable to connect a Network Audio Player or AV receiver directly to this port.

Note: If your Network Audio Player is directly connected to the Player port, it will not be visible on the network when the Digital Music Library is powered off. If this will be an issue, connect your Network Audio Player to the router or switch instead.

12 Ethernet Port for Router or Hub

Use an Ethernet cable to connect a wireless router, hub, or switch on your network to this port. Then you will be able to access the Digital Music Library from computers and mobile devices on your network.

13 SFP Port

This port can be used instead of the LAN port (the Ethernet port for router or hub) by using an SFP module (not included). Use only the supported SFP modules listed on dela.global.

14 Power Connector

Use the included power cable.

*Only the first partition of a connected USB drive is mounted. Additional partitions are not recognized. To utilize the capacity of the whole drive, connect the USB device to any of the USB ports of N5 and select "Mount and Scan" or "Backup or Restore" as the action for the drive; navigate to *Settings > Drive*, select *Format USB Drive*, then select *Erase All Data* to format all partitions. Please note that all data currently on the drive will be deleted with this operation.


Display

Home Screen

Turn on the Digital Music Library. After it boots, the home screen will be displayed.

Notes:

- Refer to the [“Remotely Operating the Digital Music Library”](#) section in chapter 3 to remotely operate the Digital Music Library using a web browser on a mobile device or a computer.
- The display will automatically turn off about 30 minutes after stopping any Digital Music Library operations. To turn the display back on, push any button on the Digital Music Library other than the power button. The display will not automatically turn off while the Digital Music Library is in any of the following situations:
 - Connected to a Network Audio Player that is powered on.
 - Connected to a USB-DAC device that is powered on.
 - Connected to a backup drive.
 - Being accessed from a computer.
 - Accessing a media server.

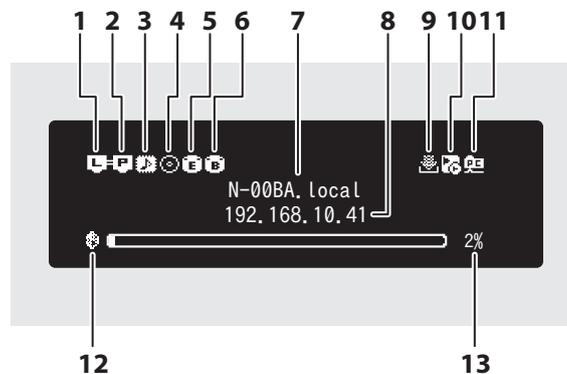

The home screen displays the following information:


Number	Item	Description
1	Status of Connected Router or Hub	<p>🔌: Displays when a router or switch that is connected to the Digital Music Library's LAN port is on. (🔌 displays when connecting to the SFP port*)</p> <p>🔌: Displays when no Ethernet cable is connected to the LAN port or a router or switch is off. (🔌 displays when connecting to the SFP port*)</p>
2	Status of Connected Player	<p>The icon in the diagram appears when the Player port is enabled through the settings.</p> <p>🎵: Displays when the Player port is configured to bridged mode and a connected Network Audio Player is on.</p> <p>🎵: Displays when no Ethernet cable is not connected to the Player port or a connected Network Audio Player is off.</p>
3	Markerless DSD Compatibility for USB-DAC	<p>🔌: Displays when a USB-DAC device that is compatible with Markerless DSD is connected.</p> <p>🔌: Displays when a USB-DAC device that is not compatible with Markerless DSD is connected.</p>
4	Optical Drive Indicator	<p>🔌: Displays if an optical drive is connected. The icon will be extinguished if no optical drives are connected.</p>

Number	Item	Description
5	Expansion Drive Indicator	 : Displayed in the following cases: <ul style="list-style-type: none"> When a USB drive is connected to the Expansion port on the N1. When a USB drive is connected to the front port on the N1, and "Mount and Scan" is selected as an action for the drive. When a USB drive is connected to any USB port on the N5, and "Mount and Scan" is selected as an action for the drive.  : Displays when USB drives are connected to the front and Expansion ports on the N1, or the front and rear ports on the N5. <p>The icon will blink while the device searches for music files. When the icon stops blinking, playback is ready.</p>
6	Backup Drive Indicator	 : Displayed in the following cases: <ul style="list-style-type: none"> When a USB drive is connected to the Backup port on the N1. When a USB drive is connected to the front port on the N1, and "Backup or Restore" is selected as an action for the drive. When a USB drive is connected to any USB port on the N5, and "Backup or Restore" is selected as an action for the drive.
7	Friendly Name (Hostname)	Displays the friendly name (hostname) of the Digital Music Library. The friendly name is used when accessing the Digital Music Library from an app or computer.
8	IP Address	Displays the IP address. The IP address is used when accessing the Digital Music Library from a computer. If no IP address is displayed, the Player port is set to isolated mode.
9	Status of Downloader	 : Displays when an account was added and periodic downloads is enabled.  : Displays when an account was added but periodic downloads is disabled.  : Displays when an error occurs and downloading fails.
10	Controller Settings	<p>The icon will appear when a USB-DAC device is connected.</p>  : Displays when controller mode is configured to "Hybrid Mode".  : Displays when controller mode is configured to "UPnP/DLNA compatible Mode".  : Displays when controller mode is configured to "Playlist Mode".  : Displays when controller mode is configured to "Roon Ready Mode".
11	File Sharing Indicator	 : Displays when file sharing is enabled.
12	External Clock Generator Indicator	 : Displays if an external clock generator is connected to the N1.
13	Usage Capacity of Internal Drive	Displays the used capacity of the internal drive in the Digital Music Library, using a bar chart and a percentage (%).

*The SFP port can be used instead of the LAN port (the Ethernet port for router or hub) by using an SFP module (not included). Use only the supported SFP modules listed on dela.global.

Menu


Press the Menu/Enter button while the home screen is displayed.

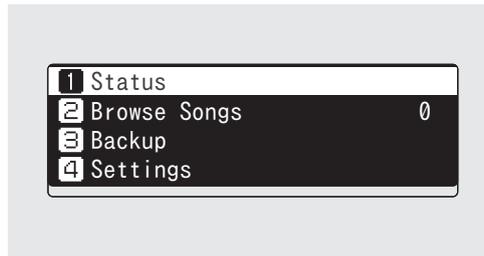

Move the cursor by pressing the Up button or the Down button, then press the Menu/Enter button to make a selection.

Dialog

When confirming an operation, the dialog screen will be displayed.

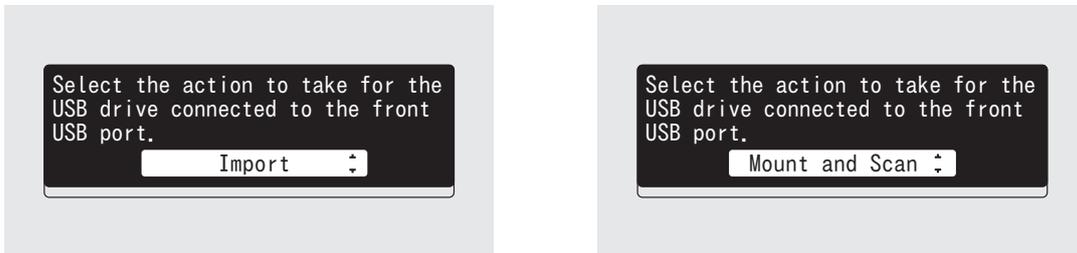

Move the cursor by pressing the Up button or the Down button, then press the Menu/Enter button to make a selection.


Streaming Screen

When the Digital Music Library starts streaming music files, the display panel will show music information for the streaming files.

Notes:

- If the music file is playing from a computer, the music information will not be displayed on the display panel.
- Depending on the streaming player, file format, or file tag information, music information may not always be displayed properly on the display panel.

Streaming to a Network Audio Player

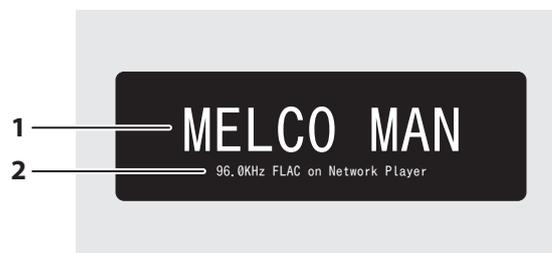


The display panel displays the following information:

Number	Item	Description
1	Title	Display the title of the music file.


Number	Item	Description
2	Player Information and Music File Information	Displays the sampling rate, file format, and the player information during file playback. Note: This item will not be shown by default. To show this item, navigate to <i>Settings > Display > Display of song titles</i> and select "Extended".

Streaming to a USB-DAC Device


Selecting a Music File on the USB-DAC Device

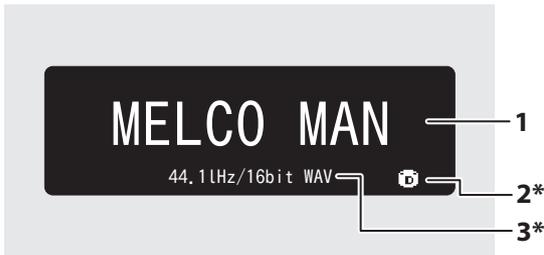

Selecting a CD Track Using Buttons on the Digital Music Library

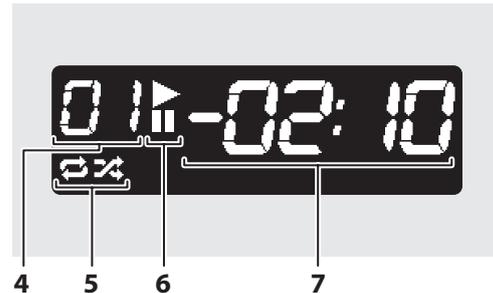

Selecting a Music File Using Buttons on the Digital Music Library

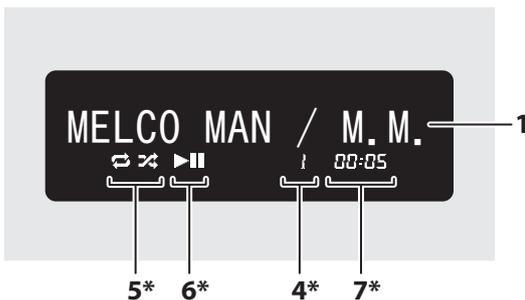

*These items will not be shown by default. To show these items, navigate to *Settings > Display > Display of song titles* and select "Extended".

The display panel displays the following information:


Number	Item	Description
1	Title	Display the title of the music file.
2	Music File Source	: Displays when streaming music files over the Digital Music Library or USB drives. : Displays when streaming music files on the network.
3	Music File Information	Displays the format and sampling rate of the music file.
4	Track Number	Displays the number of the track currently playing. Regardless of how many music files are available, only the last two digits of the track number will be displayed. For example, if track 121 is playing, this will show "21".
5	Repeat/Shuffle	: Repeats playback of all music files while this is displayed. : Shuffles playback of all music files while this is displayed. You can switch between repeat or shuffle by pressing the Up button while playback is suspended.

Number	Item	Description
6	Playback/Suspension	▶ : Appears while playing a music file. ⏸ : Appears while playback is suspended.
7	Remaining Time/Song Time Passed	You can switch the display option by pressing the Down button while playback is suspended.

Remotely Operating the Digital Music Library

To remotely operate the Digital Music Library using a web browser, navigate to *Support > WebRemote*, then select "On". After setting "WebRemote" to "On", enter either the Digital Music Library's IP address or friendly name (hostname) into the browser's address bar and press the Enter key. The page below will then open. You can now operate the Digital Music Library remotely by clicking or tapping the buttons on the web page. As the display changes on the web browser, the Digital Music Library's display will change accordingly to match. You can still manually operate the Digital Music Library using its physical buttons while WebRemote is enabled. While "WebRemote" is enabled, the "Network", "Drive", and "Initialize Settings" options will not appear on the "Settings" page to ensure that no one but you can change or utilize these settings. To display these settings, disable "WebRemote".

Please note that not all features of the Digital Music Library will be available from a web browser.

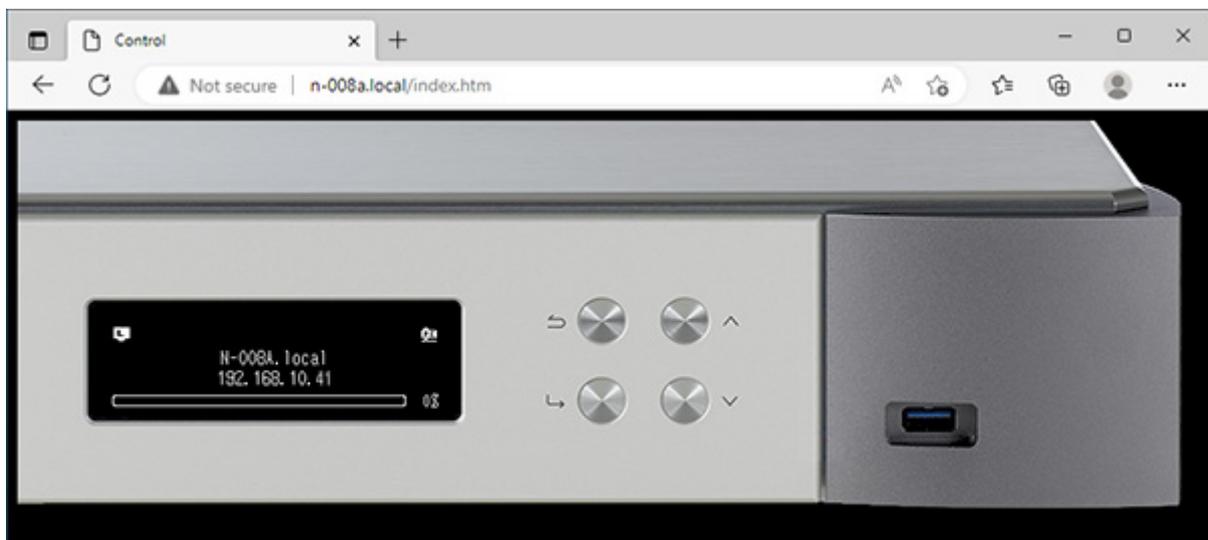

Notes:

- To easily access the Digital Music Library via a web browser for remote operation, we recommend creating a browser bookmark or a shortcut on the home screen. On a mobile device, opening the shortcut allows you to remotely operate the Digital Music Library in full screen.
- If the Digital Music Library's IP address changes, you will not be able to remotely operate the Digital Music Library through the bookmark or the home screen shortcut. In such a case, access the Digital Music Library through the web browser via its new IP address and create the bookmark or shortcut again. To keep using the same bookmark or shortcut, we recommend setting a static IP address for the Digital Music Library. Refer to the "[Changing the IP Address](#)" section in chapter 4 for the procedure to configure a static IP address for the Digital Music Library.
- When you click or tap the Digital Music Library's display on the web browser, the display will be in full screen. Click or tap the screen again to exit the full screen display.

Switching Between the Internal or External Clock Generator to the N1

By default, the internal clock generator of the Digital Music Library is the master clock generator. However, you can use the external clock generator as the master clock generator by following the procedure below.




Before connecting or disconnecting the external clock generator, or pressing the Clock Generator Select button, power off the Digital Music Library first as described in the procedure below. If you do not follow the procedure, the Digital Music Library may stop working, and malfunction of the unit may also result.

If the Digital Music Library stops working, power it off and configure the clock generator function by referring to the procedure below. Unless the Digital Music Library has malfunctioned, it can continue to be used as normal.


1 Power the Digital Music Library off.

To power the Digital Music Library off, press and hold down the power button.

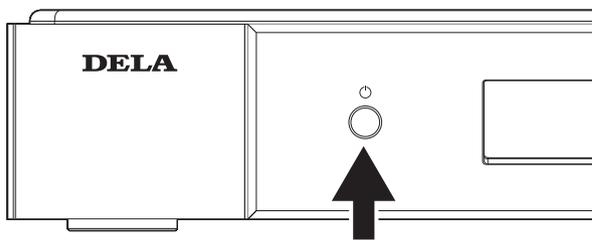

2 To use the external clock generator, connect the clock generator.


To use the internal clock generator, disconnect the clock generator.

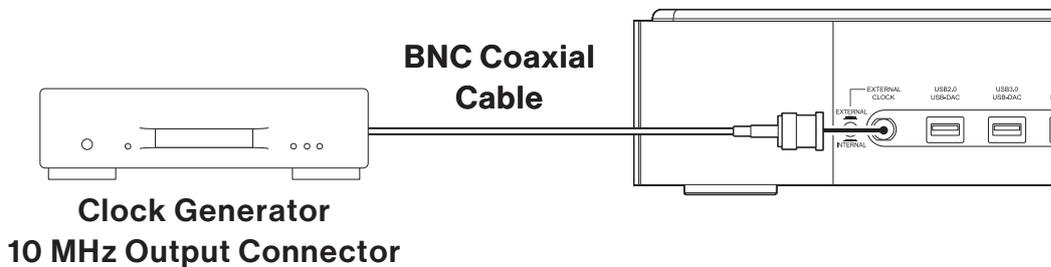

3 Press the Clock Generator Select Button.

To use the external clock generator, move the button to the unpressed position ().


To use the internal clock generator, move the button to the pressed position ().



4 Power the Digital Music Library on.

To power the Digital Music Library on, press the power button.

Note: The power LED will blink red if the clock generator has not been connected when the Clock Generator Select Button is in the unpressed position. If this occurs, power off the Digital Music Library and connect the clock generator, then try again.

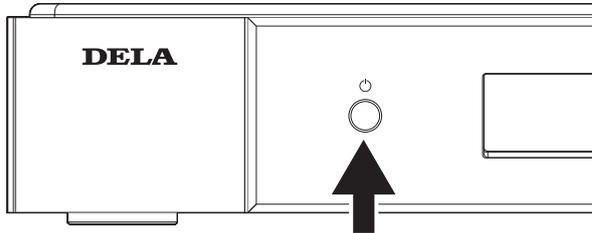

Importing Music Files



Music files can be imported from a USB drive or a CD to the Digital Music Library.

Importing from USB Drives

To import music files from a connected USB drive, follow the procedure below.

1 Connect the USB drive that contains music files to the front USB port.**Notes:**

- Use only the compatible USB drives listed on dela.global.
- Connect only USB drives formatted using NTFS, FAT32, or exFAT.

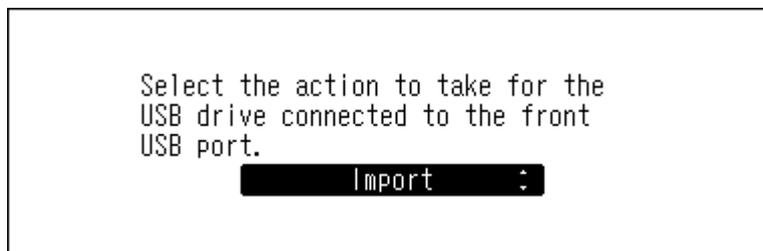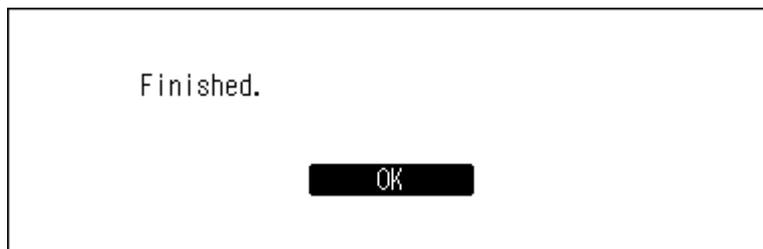2 Press the Up/Down buttons and select "Import", then press the Menu/Enter button.**3** Wait until music importing is finished.**4** Press the Menu/Enter button.**5** Disconnect the USB drive.

Notes:

- If a filename or folder name starts with a period (.), the file or folder cannot be imported.
- If the Back button is pressed while importing, the import process will be cancelled after the Digital Music Library finishes importing the current file. If the imported file size is large, the cancellation process may take a few minutes to finish.

Import Destination Details

Imported music files will be stored in the “import” folder. There are two options to store the imported data in the Digital Music Library. To change these options, navigate to *Settings > Import from USB Drive* and select “Into One Folder” or “Into Folders by Date”.



- **Into One Folder:** If you select this option, data will be imported into the “all” folder within the “import” folder. With this option, only files with changes will be imported to the Digital Music Library. Files with no changes from the previous import session will not be imported.
- **Into Folders by Date:** If you select this option, a folder that contains the import date in the folder name will be created within the “import” folder and all imported files will be stored in that folder. Even if the same data is included in the USB drive, it will be copied to the Digital Music Library.

Importing from a Music CD

To import tracks from a music CD, follow the procedure below.

Notes:

- Importing tracks from a music CD requires an optical drive (not included). Use only the compatible optical drives listed on dela.global. Depending on the manufacture date, circumstances, and specifications of a connected optical drive, it may not work even if the optical drive is listed as a compatible device.
- You can save the imported music files to the expansion drive. For more information about this setting, refer to the [“Importing Music Files to an Expansion Drive”](#) section in chapter 4.

- 1** Connect an optical drive to the Digital Music Library.
- 2** Insert a music CD into the optical drive to import its tracks.
- 3** If the USB-DAC device is connected to the Digital Music Library, the following screen will be displayed. Press the Up/Down buttons and select “Import”, then press the Menu/Enter button.



- 4** When the CD is detected, the Digital Music Library will try to get the album information automatically. When the display changes from getting the music album information, press the Menu/Enter button.


If the Digital Music Library is connected to the Internet, music tracks will be imported using the acquired album information.

If multiple titles are found, select the appropriate album title on the displayed window. Once you have selected the album title, you can return to the previous window and select it again by pressing the Back button. The album title with the "🖼️" symbol will contain the cover art.


If the Digital Music Library is not connected to the Internet, or if the CD information is not available from the online music database, the album name and music title information will not be acquired. In such a case, the import date will be used as the album name and the track number as the filename.

Note: If the Digital Music Library cannot get the music album information while connected to the Internet, check your device's security settings or security software to make sure that the Digital Music Library has permission to access the Internet.

- 5** Check the imported tracks using the Up/Down buttons and press the Menu/Enter button.

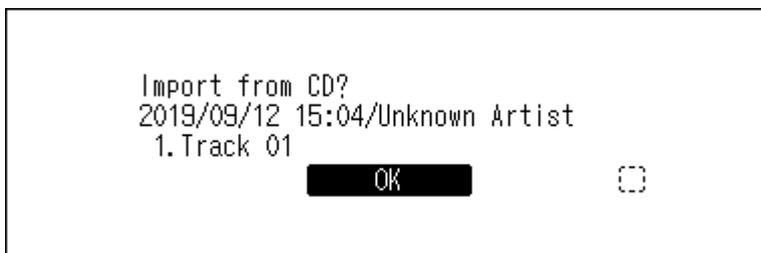


- 6** The import process will start. The album title, artist, title of the music file, and format information will be displayed.

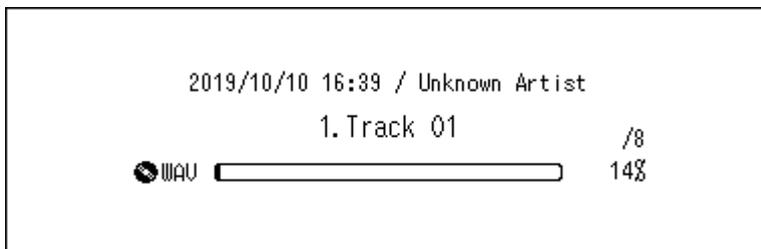

After importing finishes, the disc tray of the optical drive will open automatically.

- 7** Press the Menu/Enter button.

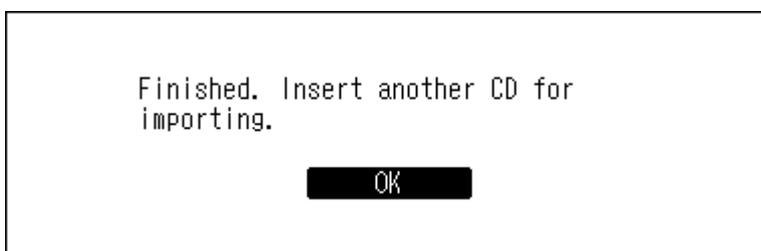

To import tracks from another CD, repeat the process from step 2 above. If you have finished importing, press the Down button or the Back button.

Import Destination Details

Imported tracks will be stored in the "import_CD" folder. If importing from a non-music CD, the imported data will be stored in the "import" folder, not the "import_CD" folder.

Imported tracks can be moved, copied, and shared on a network, but the cover art file (folder.jpg) cannot be viewed by another device or copied to another location outside the “Internal” folder. If you want to move or copy the “import_CD” folder to another device and it contains a cover art file, remove the file first.

To stop acquiring the cover art files when importing music file, navigate to *Settings > USB-CD Drive > Gracenote Coverart* and select “Off”.

File Format of Imported Music Files

When importing music files from a CD, they will be saved as WAV files by default. They can be changed to FLAC files, and FLAC compression levels are changeable as well. Available compression levels are described in the [“Menu List”](#) section in chapter 5.

Changing the Cover Art


The cover art file (folder.jpg) is stored in the “import_CD” folder. To change the cover art, replace the current cover art file with a new one. If the old cover art is displayed from a controller app, refresh the content on the controller app to apply any changes. If the old cover art is still displayed, rescan the music database by navigating to *Settings > Music Database > Rescan Songs and Playlists* on the Digital Music Library.

Importing Files from a Computer


To import music files from a computer, follow the procedure below.

Windows

- 1 From “Network” of Windows Explorer, click the Digital Music Library’s IP address or friendly name (hostname). If you cannot find it, enter “\” and the Digital Music Library’s IP address or friendly name (hostname) into the address bar of Windows Explorer, then press the Enter key. (You can also enter them into the Run dialog box, which can be opened by pressing the Windows logo key + R.)
- 2 If the credential window appears on a Windows computer, enter “nobody” for both the username and password, then click OK.

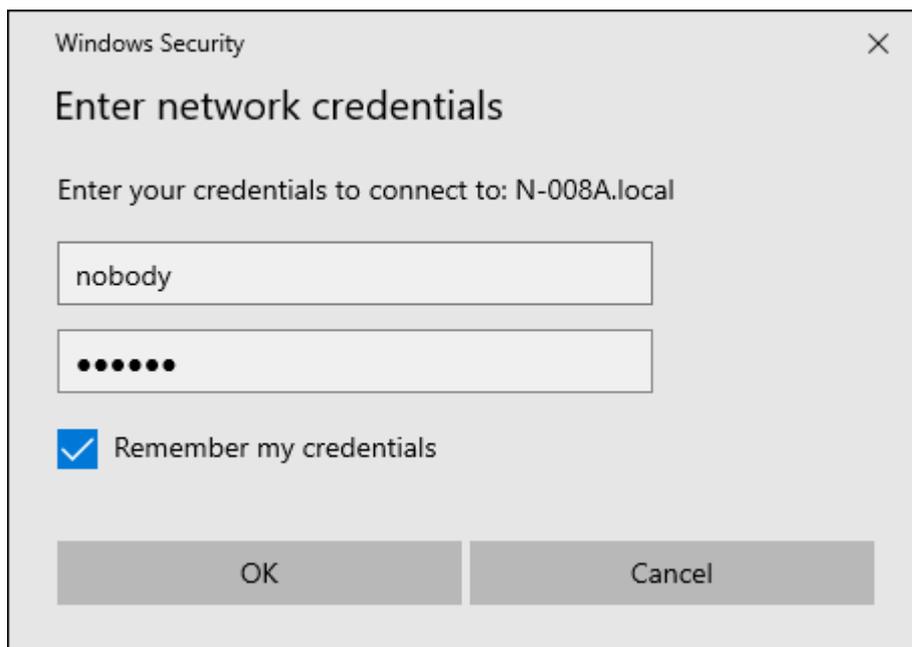


- 3 The shared folders on the Digital Music Library will be displayed. Double-click the “Internal” folder. If no folders are displayed, wait for about 30 seconds and try it from step 1 again.

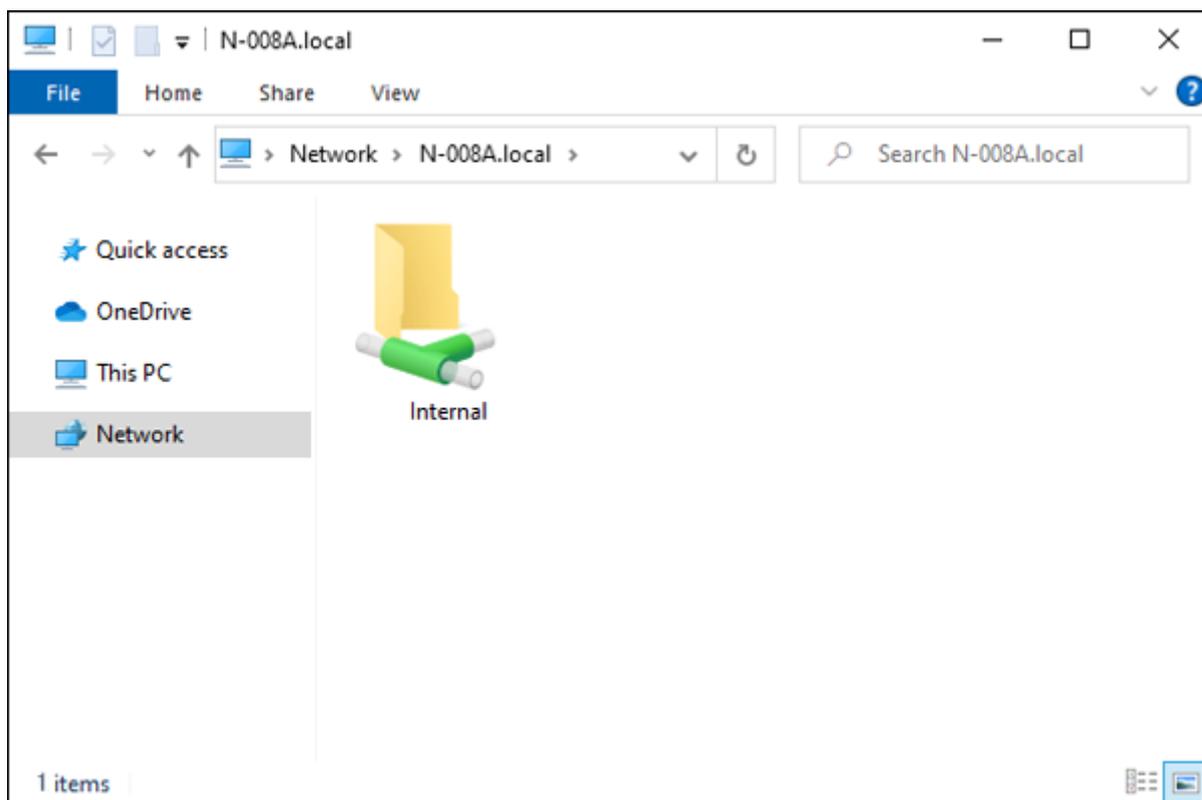


- 4 Copy music files into the displayed folder.

macOS


- 1 Open Finder and click *Go > Connect to Server*.
- 2 Enter "smb://" and the Digital Music Library's IP address or friendly name, then click *Connect*.
- 3 Click *Connect*.

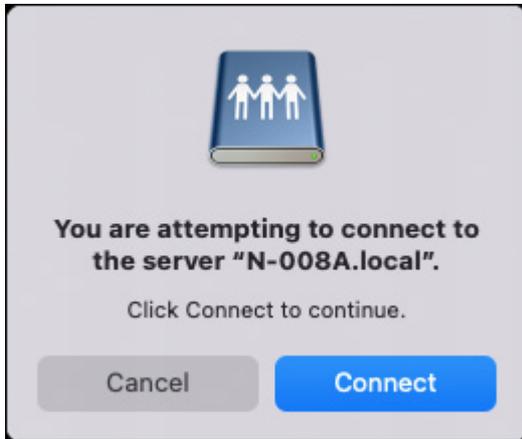

- 4 Enter "nobody" for both the username and password, then click *Connect*.

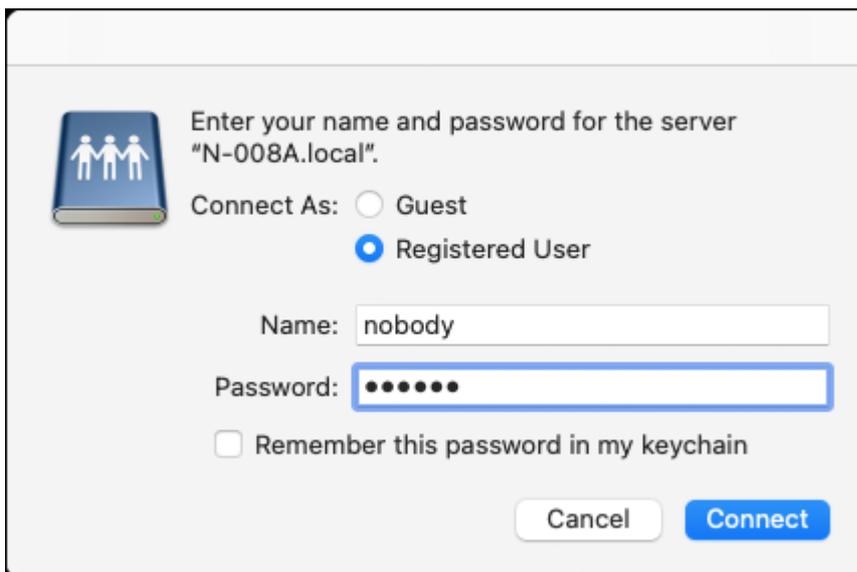

- 5** The shared folders on the Digital Music Library will be displayed. Select the “Internal” folder, and click *OK*. If no folders are displayed, wait for about 30 seconds and try it from step 1 again.

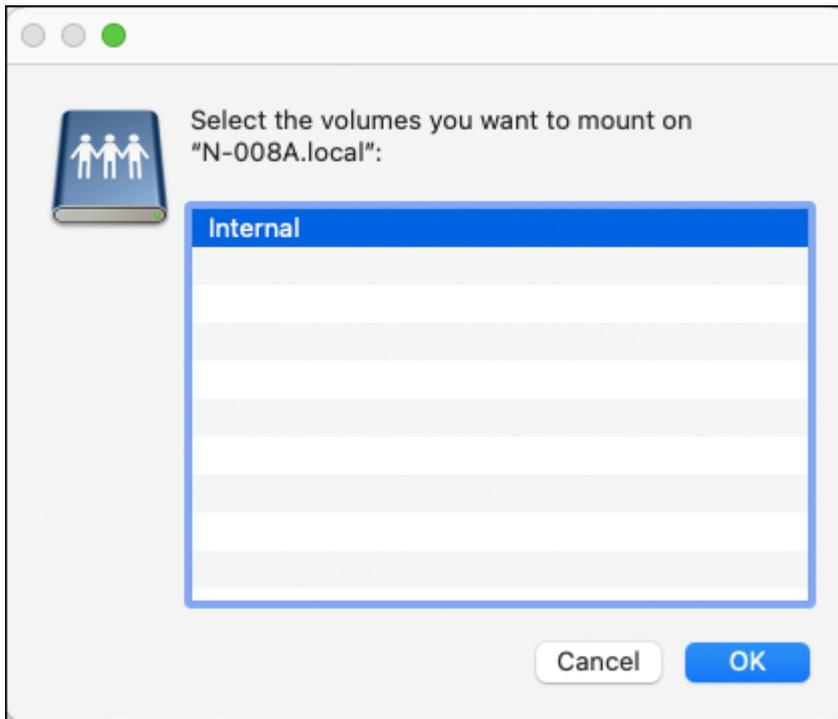


- 6** Copy music files into the displayed folder.

Note: Even when you close the shared folder, from the next time on you can open it from the sidebar of Finder.


If Unable to Access from a Computer

If the file sharing status icon (refer to item number 11 in the [“Home Screen”](#) section) is not displayed on the home screen, enable the file sharing service. To enable the file sharing service, follow the procedure below.


- 1** Press the Menu/Enter button to display the menu list at the home screen.

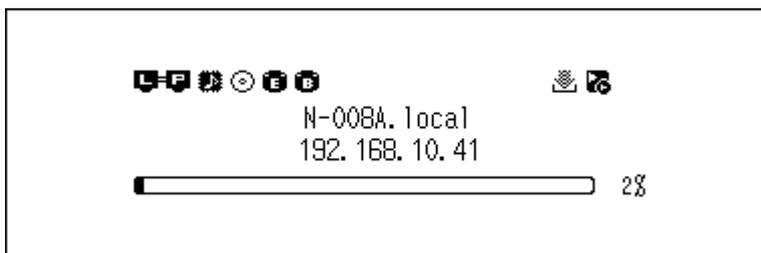


- 2** Press the Up/Down buttons and select “Settings”, then press the Menu/Enter button.

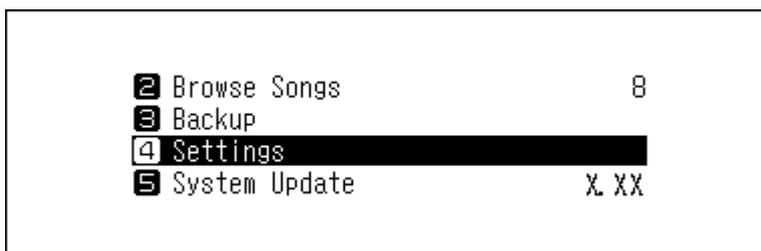


3 Press the Up/Down buttons and select “SMB File Sharing”, then press the Menu/Enter button.

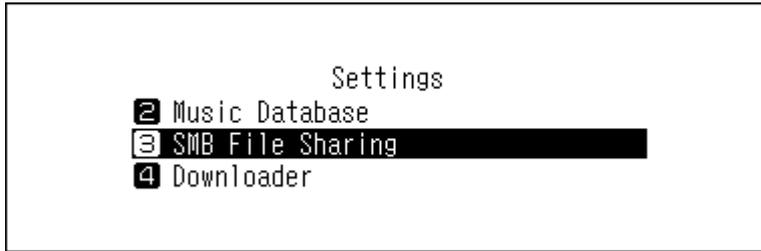

4 Press the Up/Down buttons and select “On”, then press the Menu/Enter button.

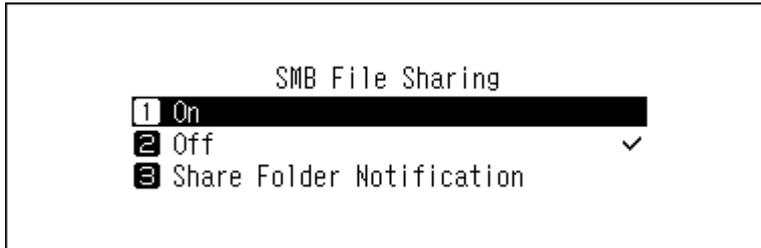

5 Press the Menu/Enter button.

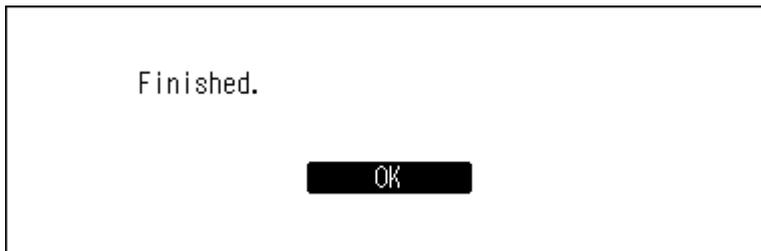

Confirming Imported Files


Imported files can be accessed from mobile devices or computers that are connected to the same router as the Digital Music Library. Follow the appropriate procedure below.

Using Mobile Devices

You can confirm the imported files using a UPnP/DLNA-compatible app. If using an iPad or iPhone, you can also confirm the imported files by opening the shared folder from the “Files” app by following the procedure below.

1 Open the “Files” app.


2 Tap  > *Connect to Server*.

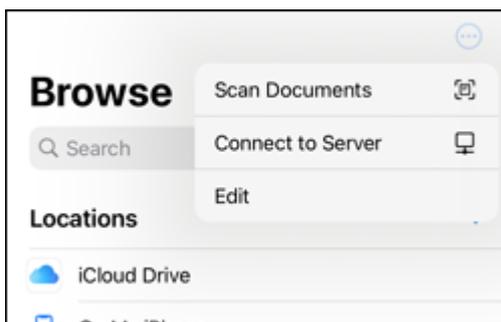


- 3** Enter “smb://” and the Digital Music Library’s IP address or friendly name, then tap *Connect*.



- 4** Enter “nobody” for both the username and password, then tap *Next*.

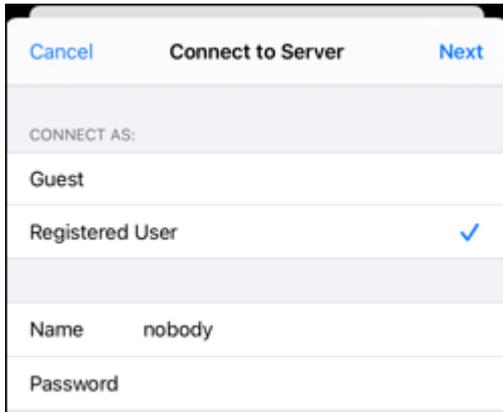

- 5** The shared folders on the Digital Music Library will be displayed. Tap the “Internal” folder. If no folders are displayed, wait for about 30 seconds and try it from step 2 again.

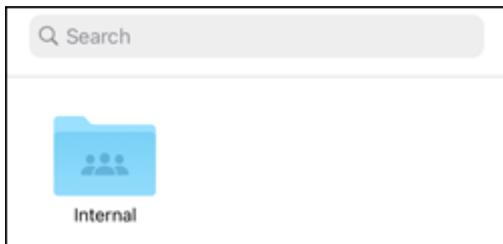

Note: Even when you close the shared folder, from the next time on you can open it from “Browse”.

Using Computers

To confirm imported music files using a computer, follow steps 1–3 from the [“Importing Files from a Computer”](#) section above to open the shared folder. If the imported files are displayed, importing was finished properly.

Downloading Music Files from Streaming Sites

Downloader can download music files from streaming sites automatically. Once you purchase the music files from a mobile device or computer, the Digital Music Library can download the files from the streaming site, even if you’re not at home.

Supported streaming sites are listed below:

- HIGHRESAUDIO
- Qobuz
- OTOTOY*
- mora*

*These streaming sites are available only in Japan.


Notes:

- Create an account on one of the streaming sites above before using downloader. Also, make sure the Digital Music Library is connected to the Internet. You can verify if the Digital Music Library is connected to the Internet from *Status > Network > LAN*.
- To use this function, the time settings should be acquired from the NTP server automatically.
- Do not move the folder under the “download” folder that contains the account name in its folder name to another folder. If the folder is moved, the Digital Music Library may download the same music files again.


Adding Accounts

To add an account from a streaming site to the Digital Music Library, follow the procedure below.


- 1 Create an account on the streaming site.
- 2 Press the Menu/Enter button to display the menu list at the home screen.

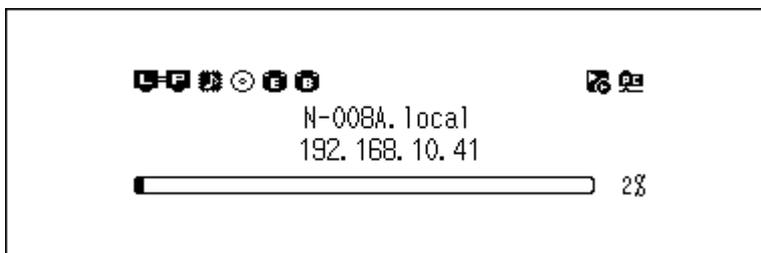


- 3 Press the Up/Down buttons and select “Settings”, then press the Menu/Enter button.

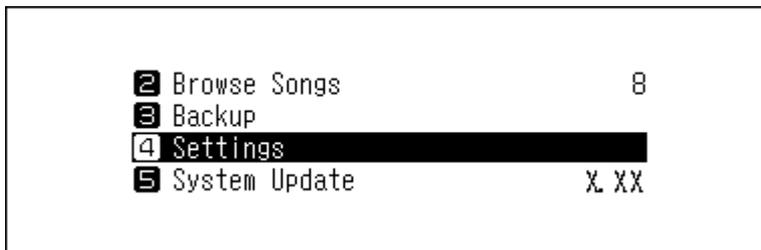


- 4 Press the Up/Down buttons and select “Downloader”, then press the Menu/Enter button.

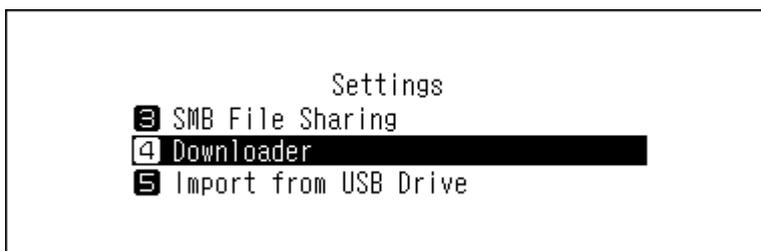


- 5 Press the Up/Down buttons and select “Account Settings”, then press the Menu/Enter button.

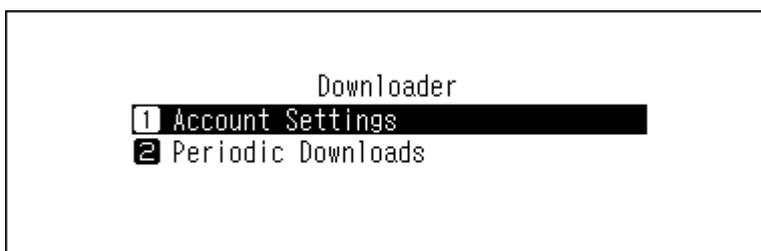


6 Press the Up/Down buttons and select “Add/Edit Account”, then press the Menu/Enter button.

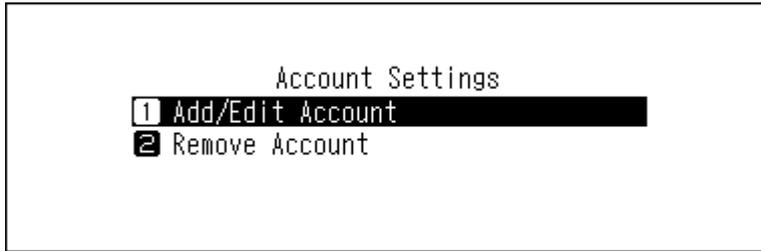

7 Press the Up/Down buttons and select “Add Account”, then press the Menu/Enter button.

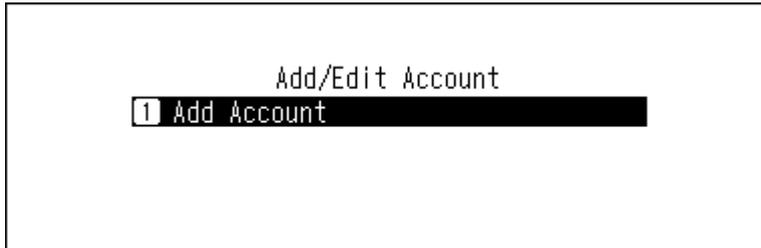


8 Press the Up/Down buttons and select the streaming site to add an account, then press the Menu/Enter button.

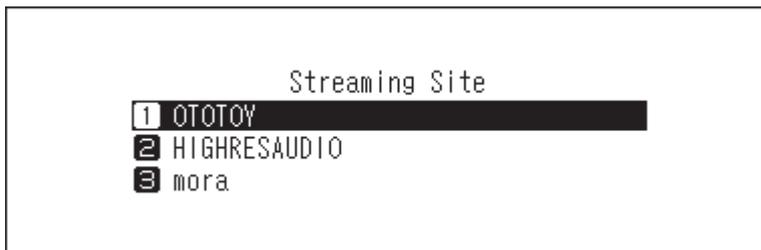

9 Press the Up/Down buttons and enter the account ID, then press the Menu/Enter button.


Note: When you add your Qobuz account to the Digital Music Library, the account ID and password may not be required if you have previously used the same account ID and password for another Digital Music Library function.

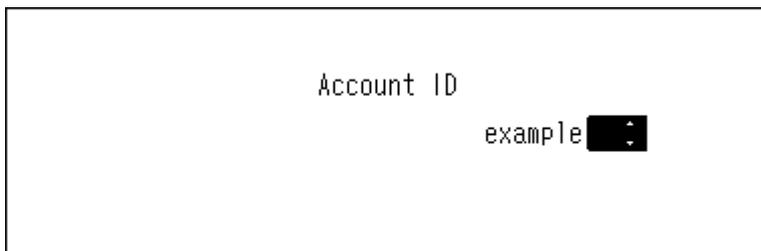

10 Press the Up/Down buttons and enter the account password, then press the Menu/Enter button.



- 11** When the credentials are authenticated, the following message will be displayed. Press the Menu/Enter button.

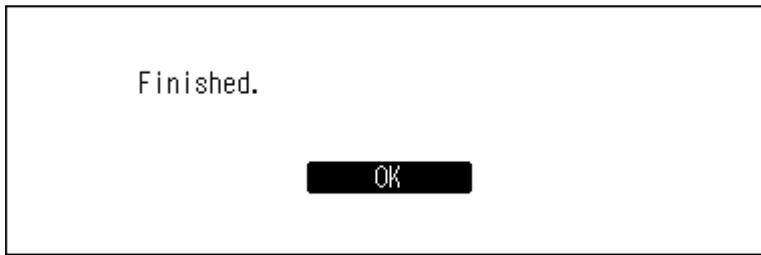


After an account has been added, periodic downloads will be automatically enabled.

Note: If you want to download files immediately, navigate to *Settings > Downloader > Periodic Downloads*. Make sure "On" is selected, then press the Menu/Enter button.


Enabling or Disabling Periodic Downloads

After adding an account of a streaming site to the Digital Music Library, the downloader will check the streaming site periodically for the purchased files. To disable this periodic check, follow the procedure below.

- 1** Press the Menu/Enter button to display the menu list at the home screen.

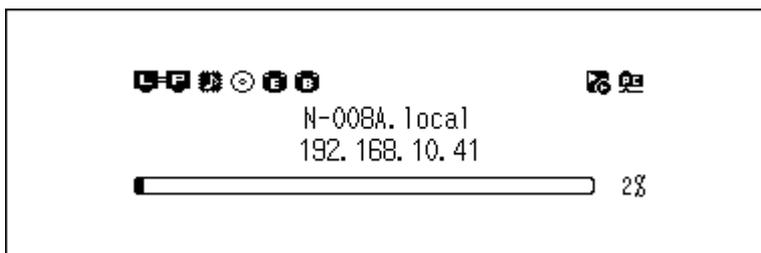


- 2** Press the Up/Down buttons and select "Settings", then press the Menu/Enter button.

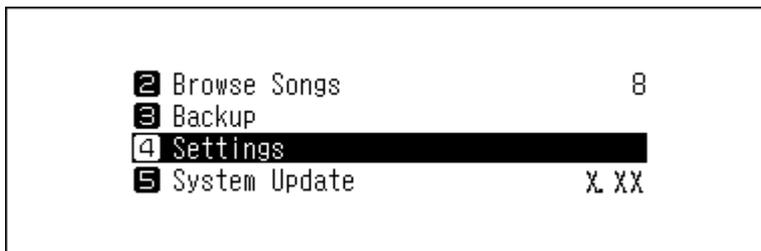


- 3** Press the Up/Down buttons and select "Downloader", then press the Menu/Enter button.



- 4** Press the Up/Down buttons and select “Periodic Downloads”, then press the Menu/Enter button.

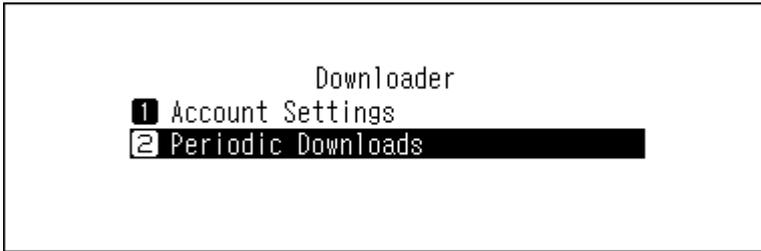

- 5** Press the Up/Down buttons and select either “Off” or “On”, then press the Menu/Enter button.

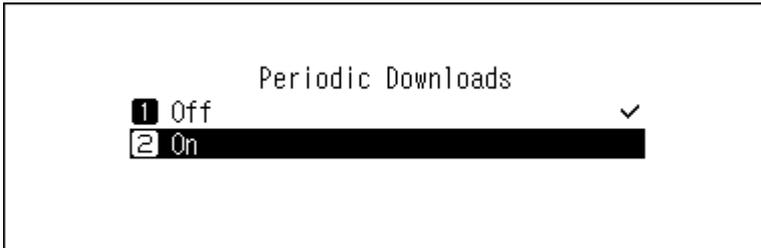


- 6** Press the Menu/Enter button.




Deleting Accounts

To delete an existing account from the Digital Music Library, follow the procedure below.


- 1** Press the Menu/Enter button to display the menu list at the home screen.

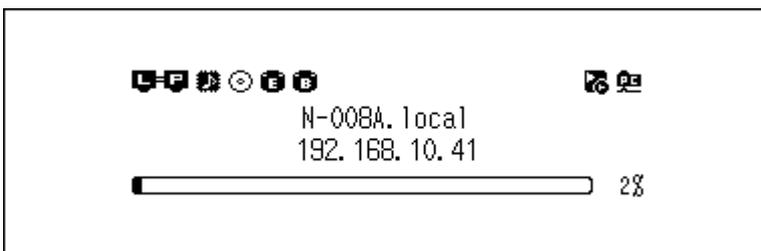


- 2** Press the Up/Down buttons and select “Settings”, then press the Menu/Enter button.

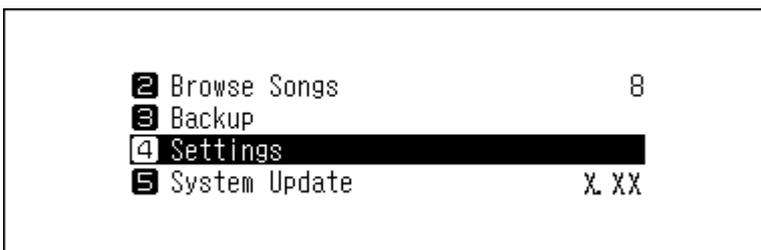

3 Press the Up/Down buttons and select “Downloader”, then press the Menu/Enter button.

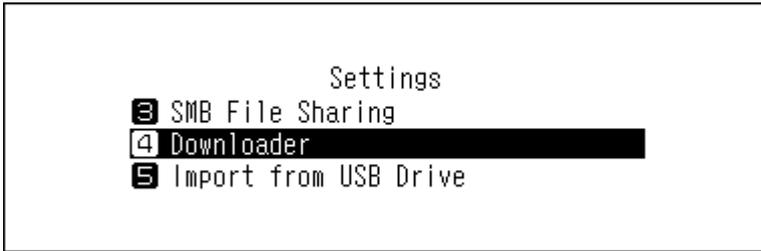

4 Press the Up/Down buttons and select “Account Settings”, then press the Menu/Enter button.

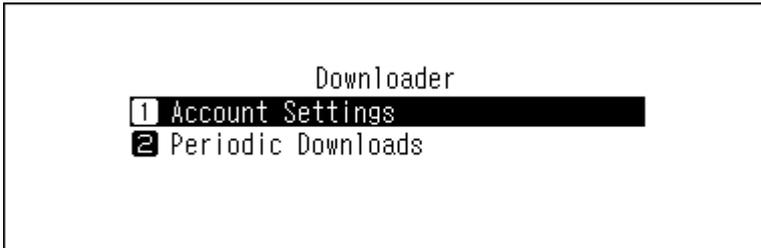

5 Press the Up/Down buttons and select “Remove Account”, then press the Menu/Enter button.




6 Press the Up/Down buttons and select the account to be deleted, then press the Menu/Enter button.



7 Press the Up/Down buttons and select “OK”, then press the Menu/Enter button.



8 Press the Menu/Enter button.

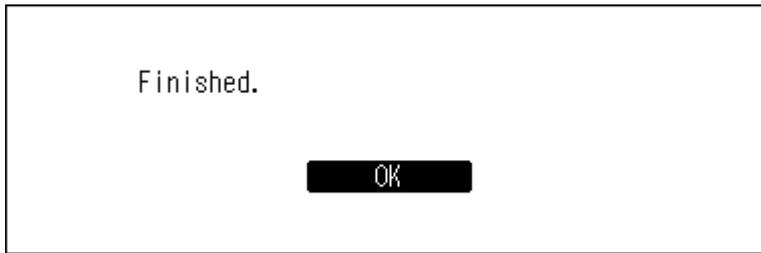


Note: If you remove all accounts with periodic downloads enabled, it will be disabled automatically.

Playing Music Files on a Network Audio Player

Imported music files can be played using the Network Audio Player. The procedure to play music files is different depending on the Network Audio Player, so refer to your Network Audio Player's manual for more detailed information on how to play music.

Note: You can play music files from an expansion drive on you Network Audio Player. For more information about this setting, refer to the "[Streaming Music Files from Expansion Drives](#)" section in chapter 4.

Digital Music Library (N1 or N5)

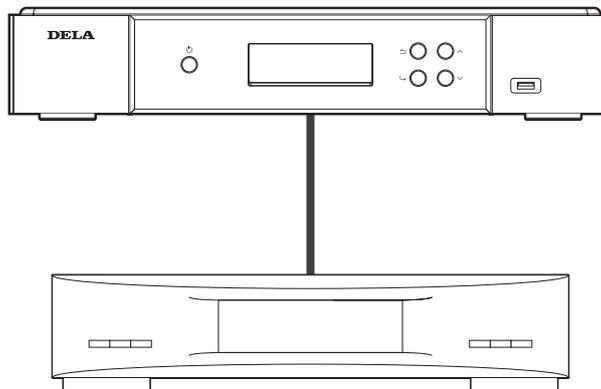

Network Audio Player

Streaming Imported Music Files

The Digital Music Library supports streaming of files with the extensions below.


Supported File Types for Streaming

Extensions	mp3, wma, wav, lpcm, pcm, ogg, m4a, mp4, 3gp, flac, m3u, mpa, aac, apl, ac3, aif, aiff, mp2, mp1, dsf, dff
------------	--

Playing Music Files on USB-DAC Devices

The Digital Music Library supports USB-DAC, short for “USB digital-to-analog converter”. If using buttons on the unit or a mobile device with a controller app installed, you can directly connect a USB-DAC device to the Digital Music Library to stream music and enjoy high-quality sound without using a computer.

Digital Music Library (N1 or N5)

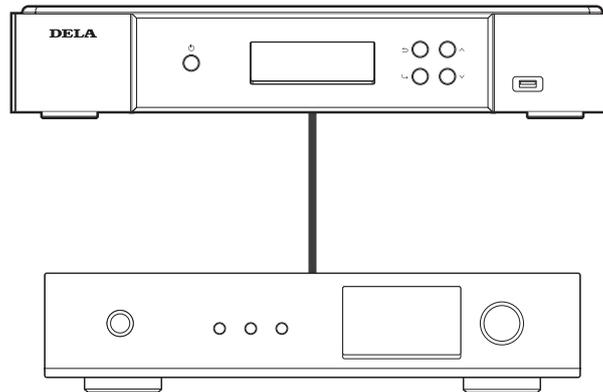

USB-DAC Device

Playing Music Files on the Digital Music Library or a USB Drive

To stream music files on the Digital Music Library or a USB drive to a USB-DAC device, use buttons on the unit or a controller app on the mobile device. For more detailed information about how to use controller apps, refer to the apps’ user guides.


If the media server app is set to “TwonkyServer”, you can play music files using buttons on the Digital Music Library using the procedure below.

Note: To check the setting of the media server app, navigate to *Settings > Music Database > Media Server App*.


- 1 Connect a USB-DAC device to the USB-DAC port on the N1 or to any USB port on the N5.

Note: When using the N1, we recommend using the USB-DAC ports to connect USB-DAC devices, but any port can be used for a USB-DAC device.

- 2 Press the Menu/Enter button to display the menu list at the home screen.

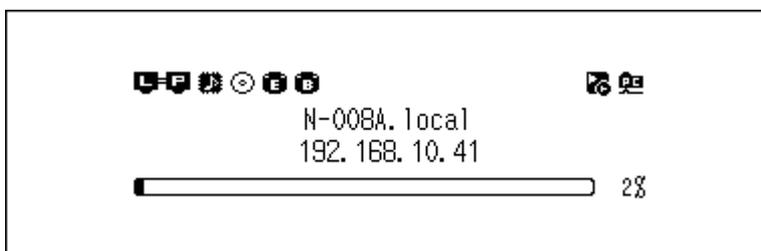


- 3** Press the Up/Down buttons and select “Play Songs”, then press the Menu/Enter button.

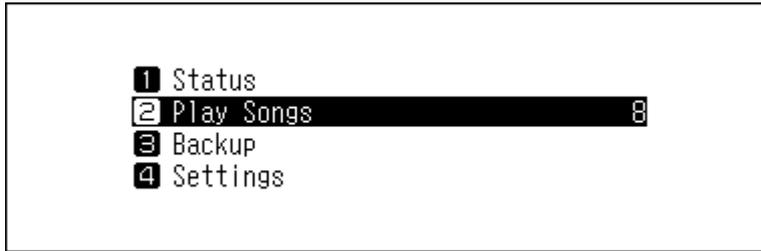

Note: If the media server app is set to “TwonkyServer”, a number will be shown to the right of “Play Songs”. This is the number of available music files to play.


- 4** Press the Up/Down buttons and select the category, then press the Menu/Enter button.

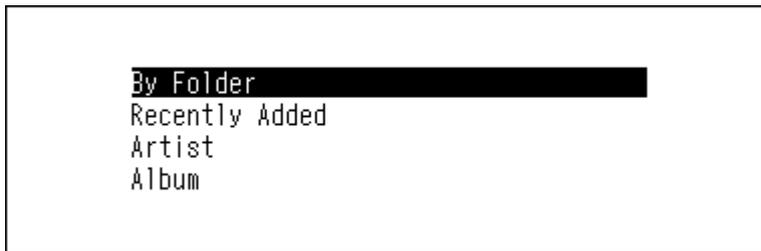

- 5** Press the Up/Down buttons and select the music file to play, then press the Menu/Enter button.



- 6** Press the Menu/Enter button.

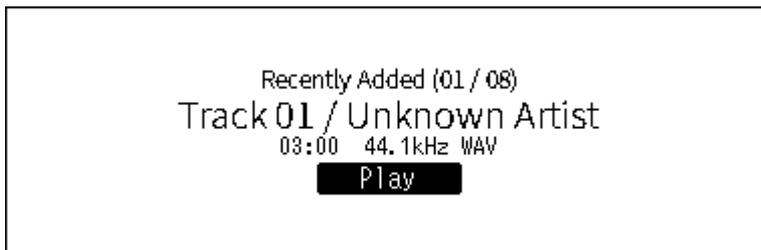

The Digital Music Library’s USB-DAC supports streaming for the following file types and sampling rates.

Supported File Types

File Types	Extensions
FLAC	.flac
ALAC (Apple Lossless)/AAC	.m4a
AIFF	.aiff, .aif
WAV	.wav
DSDIFF	.dff
DSF	.dsf

Supported Sampling Rates

- PCM: 44.1 kHz, 48 kHz, 88.2 kHz, 96 kHz, 176.4 kHz, 192 kHz, 352.8 kHz, 384 kHz, 705.6 kHz, 768 kHz
- DSD: 2.8 MHz, 5.6 MHz, 11.3 MHz, 22.6 MHz

Playing a CD Using an Optical Drive

CD Transport will allow you to play music tracks from the optical drive that is connected to the Digital Music Library using USB-DAC. To play music tracks using an optical drive, follow the procedure below.

- 1 Connect a USB-DAC device and an optical drive to the Digital Music Library using the USB 3.0 and USB 2.0 USB-DAC ports on the N1 or to any USB ports on the N5. Depending on the devices' specifications, use either the USB 3.0 or USB 2.0 port as appropriate.

Note: When using the N1, we recommend using the USB-DAC ports to connect USB-DAC devices, but any port can be used for a USB-DAC device.

- 2 Insert a music CD into the optical drive. The following screen will be displayed. Press the Up/Down buttons to select "Play", then press the Menu/Enter button. The CD will start playing.



Notes:

- To play another music CD, stop the current CD and remove it from the drive, then repeat step 2.
- Do not disconnect any optical drives or USB-DAC devices while playing music tracks.
- While playing music tracks using CD Transport, the music files on the Digital Music Library cannot be played by another Network Audio Player.

Music Playback Operations

You can use the following operations using buttons on the Digital Music Library while playing or suspending music files.

Playing

Back button	Stop playback.
Menu/Enter button	Suspend or resume playback.
Up button	Play the previous track on the album.
Down button	Play the next track on the album.
Up button - press and hold	Force stop playback while tracks are played using a controller app.

Suspending

Up button	Switch to repeat and shuffle. When the button is pressed once, playback will switch to repeat. When the button is pressed twice, playback will switch to shuffle. When the button is pressed three times, playback will switch to both repeat and shuffle. When the button is pressed four times, playback will revert to normal.
Down button	The display panel will switch to the time passed on a song or the remaining time of a song.

Configuring the Mode for Managing USB-DAC Using Controller App

By default, “Hybrid Mode” is selected and it supports many types of controller apps. However, depending on the controller app you are using, we recommend changing the controller settings to one of the following modes. It will optimize communication between the Digital Music Library and the controller app.

The controller app by Roon Labs LLC will not work until the controller settings is changed to “Roon Ready Mode”.

UPnP AV/DLNA Derivatives

- **UPnP/DLNA compatible Mode:** Select when your controller app is UPnP/DLNA-compatible.
- **Playlist Mode:** Select when your controller app is OpenHome-compatible.
- **Hybrid Mode:** This mode supports both UPnP/DLNA-compatible apps and OpenHome-compatible apps.

Roon Ready Mode


Select when your controller app is by Roon Labs LLC.

Note: If the selected controller mode does not support the controller app, the Digital Music Library may not appear as a player on the app.


To change the controller settings, follow the procedure below.

Changing to UPnP/DLNA compatible Mode or Playlist Mode


- 1 Press the Menu/Enter button to display the menu list at the home screen.

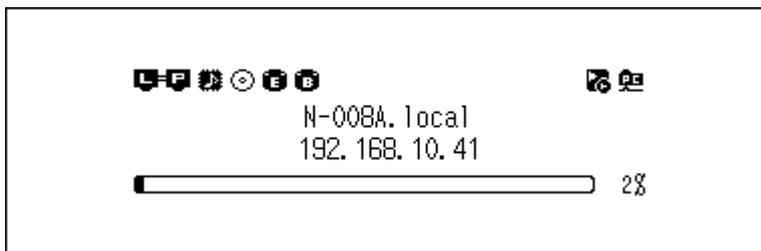


- 2 Press the Up/Down buttons and select “Settings”, then press the Menu/Enter button.

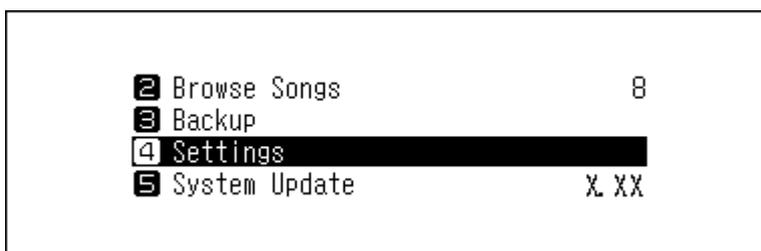


- 3 Press the Up/Down buttons and select “USB-DAC”, then press the Menu/Enter button.

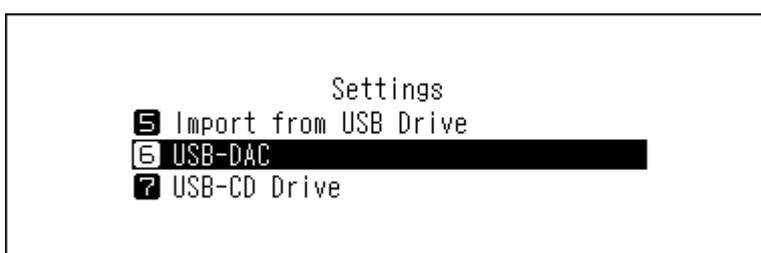


- 4** Press the Up/Down buttons and select “Controller Mode”, then press the Menu/Enter button.

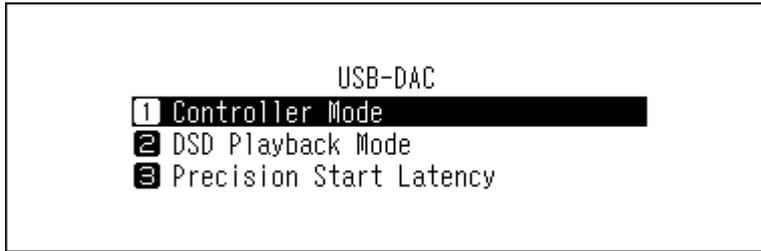

- 5** Press the Up/Down buttons and select “UPnP AV/DLNA Derivatives”, then press the Menu/Enter button.

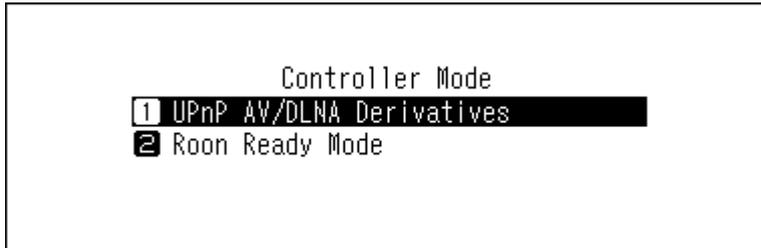

- 6** Press the Up/Down buttons and select either “UPnP/DLNA compatible Mode” or “Playlist Mode”, then press the Menu/Enter button.

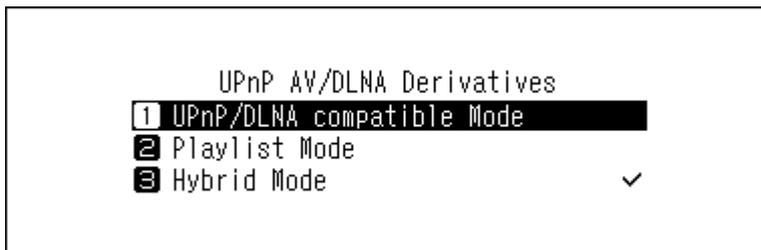


- 7** If the following message appears, press the Menu/Enter button.



Note: This message appears when the media server app is disabled. We recommend enabling the media server app. To enable it after this procedure, navigate to *Settings > Music Database > Media Server App*, and select “TwonkyServer” or “MinimServer”.


- 8** Press the Menu/Enter button.

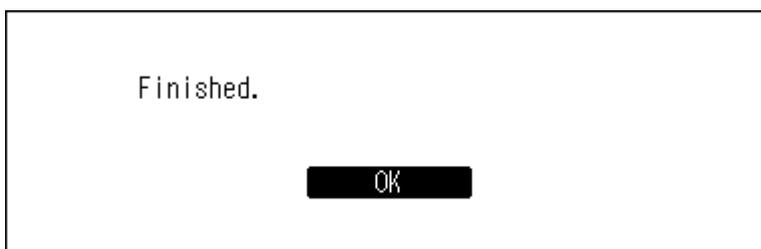


The controller mode will be changed.

Changing to Roon Ready Mode


- 1 Press the Menu/Enter button to display the menu list at the home screen.

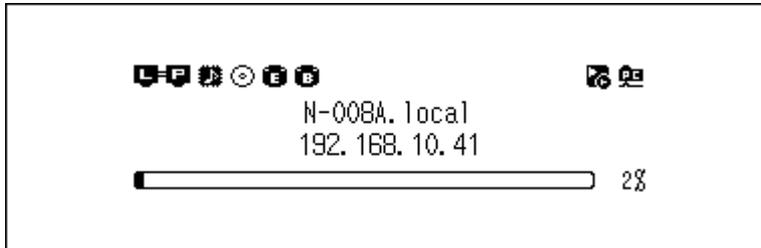


- 2 Press the Up/Down buttons and select "Settings", then press the Menu/Enter button.

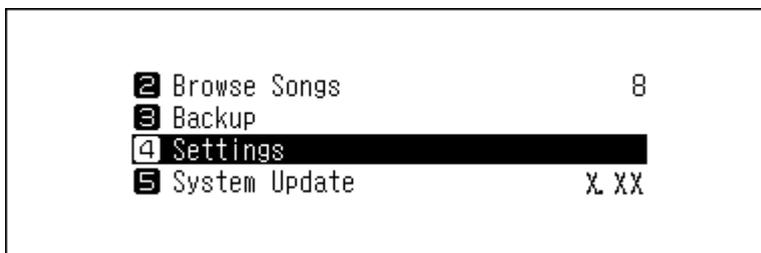


- 3 Press the Up/Down buttons and select "USB-DAC", then press the Menu/Enter button.

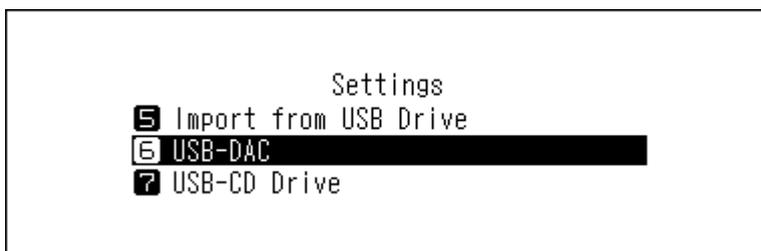


- 4 Press the Up/Down buttons and select "Controller Mode", then press the Menu/Enter button.

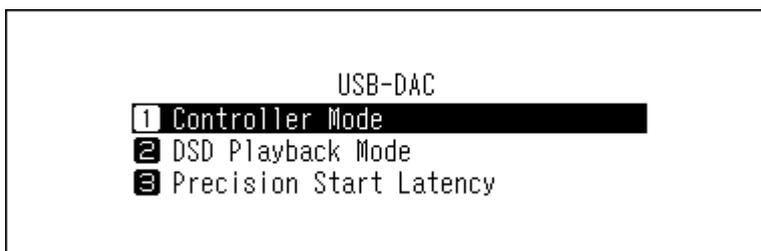

- 5 Press the Up/Down buttons and select "Roon Ready Mode", then press the Menu/Enter button.

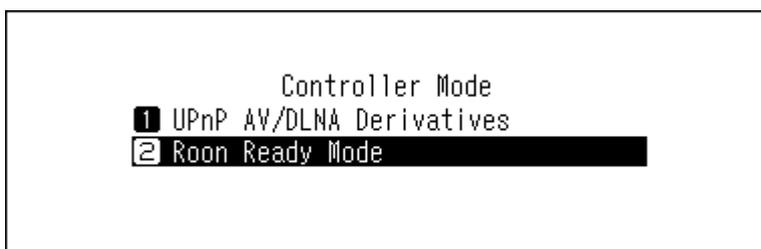


- 6** If the following message appears, press the Menu/Enter button. The media server app will be disabled.

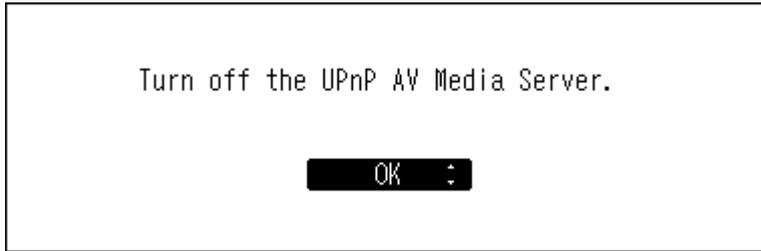

Note: If you press the Back button, the media server app will not be disabled. While "Room Ready Mode" is selected, the media server app will not be used for playback while using USB-DAC. Therefore, we recommend selecting "OK" to disable the media server.

- 7** Press the Menu/Enter button.

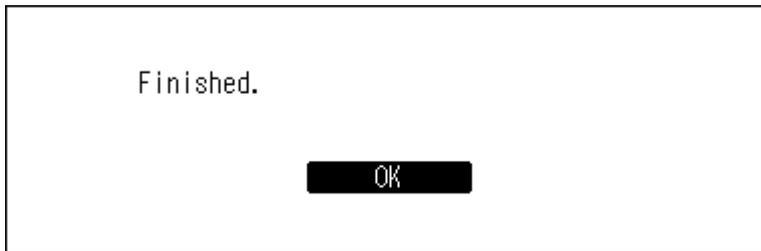

The controller mode will be changed.


Changing the DSD Playback Mode

The Digital Music Library supports three different playback modes for DSD files (.dsf, .dff). You can select from the following modes:

- **Standard:** The default and recommended playback mode. If a connected USB-DAC device supports Markerless DSD, the DSD file will be played by the Markerless DSD playback; otherwise, the DSD file will be played by DSD over PCM.
- **DSD over PCM Priority Mode:** This mode applies DSD over PCM even if a connected USB-DAC device supports Markerless DSD playback. Except for this aspect, this mode is the same as standard mode.
- **PCM Mode:** This mode will convert DSD files to PCM files. If connecting a USB-DAC device that only supports playing PCM files, selecting this mode is recommended. Except for this behavior, this mode is the same as standard mode.

To configure USB-DAC on your Digital Music Library, follow the procedure below.


- 1** Press the Menu/Enter button to display the menu list at the home screen.

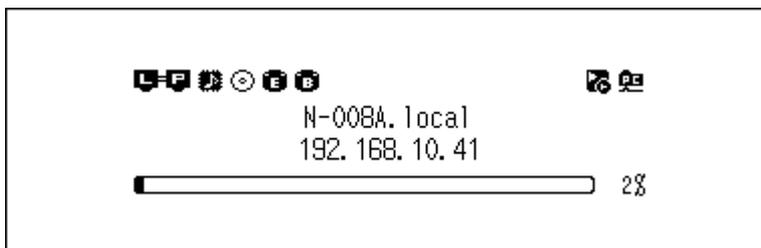


- 2** Press the Up/Down buttons and select “Settings”, then press the Menu/Enter button.




- 3** Press the Up/Down buttons and select “USB-DAC”, then press the Menu/Enter button.

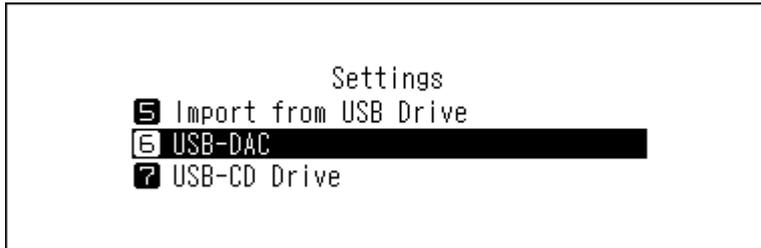


- 4** Press the Up/Down buttons and select “DSD Playback Mode”, then press the Menu/Enter button.

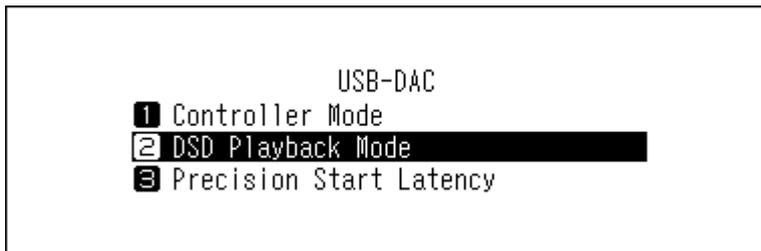


- 5** Press the Up/Down buttons and select the playback mode, then press the Menu/Enter button.

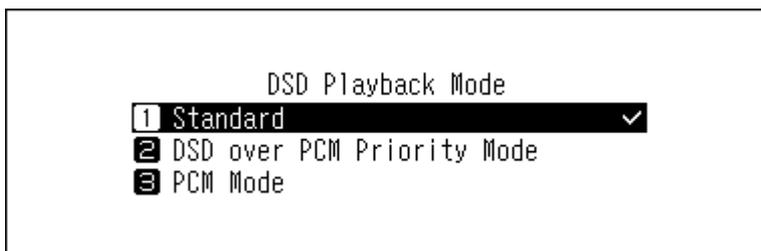

- 6** Press the Menu/Enter button.

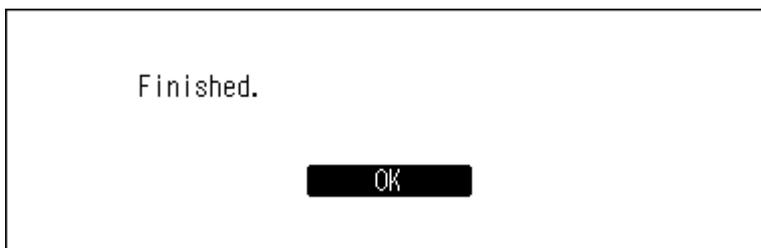

Note: By default, a gap time of 3 seconds will be added to the first track of the playlist because the beginning of a music file does not count as initial playback if the sampling rate has changed between music files or if playing DSD files on some USB-DAC devices. A 3-second gap time is the longest possible gap time. If you want to start the next music file faster, navigate to *Settings > USB-DAC > Precision Start Latency* and set a shorter gap time.

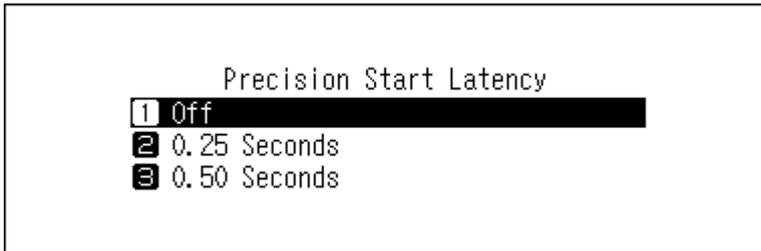

Backing Up and Restoring

Backup Operations

With this operation, both music files and settings are backed up. Backed up music files can be restored if the files are deleted.

Backup operations will vary depending on the file system of the connected USB drive. Differences between backup modes are below:

File System	Mode	Files Affected
NTFS	Differential backup	Only files with different sizes and times since the previous backup will be saved. If the file content and location (path) remain the same since the previous backup job, these files will not be backed up. If the file location changes, that file will be backed up even if the contents have not changed.
FAT32	Full backup	All files will be backed up.
exFAT		

Notes:

- Use only the compatible USB drives listed on dela.global.
- The data will be kept even if the USB drive already contains the backup data in it and a backup job runs.
- To use differential backup for FAT32- or exFAT-formatted USB drives, format it using the Digital Music Library. All data will be erased and the file system will change to NTFS after formatting.
- The Digital Music Library can format the connected USB drive into a backup drive, and we recommend using the Digital Music Library to format the drive instead of a computer. Refer to the “[Formatting Drives](#)” section in chapter 4 to format the connected USB drive. Formatting should be done before using the USB drive as the backup drive. If there are files on the USB drive, formatting will erase all data on it.
- Before backing up imported music files, make sure the date and time is configured correctly from *Settings > Date and Time*. Date and time settings will be used to create differential backups, or to maintain version control between multiple backups.


Backing Up Data

To back up imported music files, follow the procedure below.


- 1 Connect the USB drive to either the Backup or the front USB port on the N1 or to any USB port on the N5. If you connect the USB drive that contains the Digital Music Library's backup data, you can also use it for differential backups.

When the USB drive is connected to the front USB port on the N1 or to any USB port on the N5, the following screen will be displayed. Press the Up/Down buttons and select "Backup or Restore", then press the Menu/Enter button.


If "Finished." is displayed, press the Menu/Enter button.

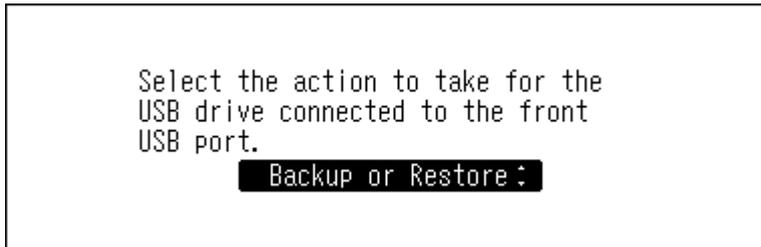


- 2 Press the Menu/Enter button to display the menu list at the home screen.

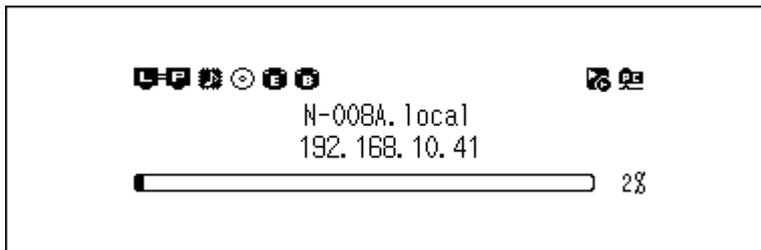

- 3 Press the Up/Down buttons and select "Backup", then press the Menu/Enter button.

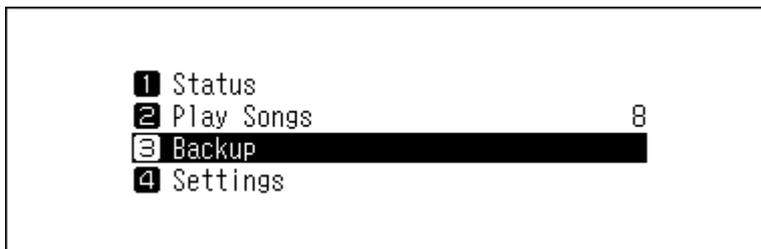

- 4 Press the Up/Down buttons and select "Start Backup", then press the Menu/Enter button.

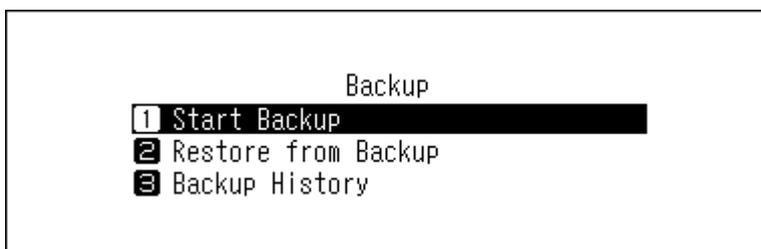


Notes:


- If the following message is displayed, the full backup will run if you press the Menu/Enter button. If you want to run a differential backup, press the Back button to stop the backup process.



- If the following message is displayed, press the Menu/Enter button to go back to the previous screen and configure the date and time correctly from *Settings > Date and Time*.

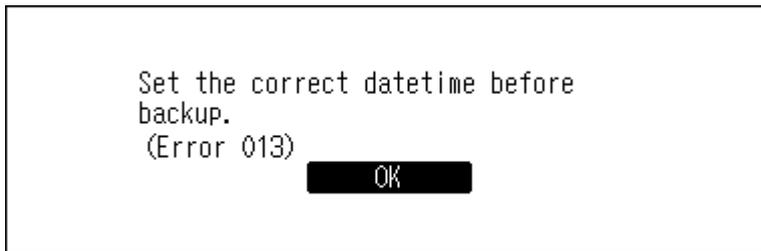

5 Press the Menu/Enter button.

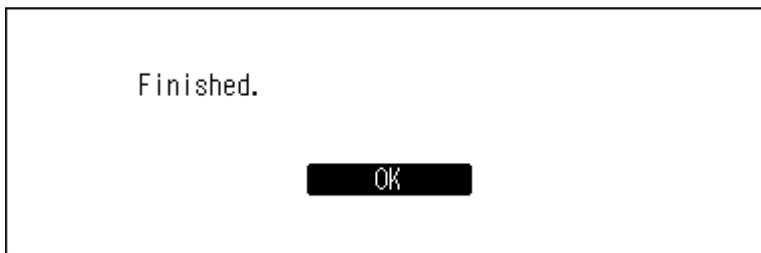

6 Disconnect the USB drive.

Note: Backed up data will be saved in the following folder:
".Anas.bak" - MAC address - backup date and time - "disk1"

Normally, a folder that contains a period in its name is treated as a hidden folder. Hidden folders cannot be displayed unless a specific setting on a computer is changed. To access the ".Anas.bak" folder from a computer, change its hidden folder settings beforehand.

Restoring Data


To restore the backup data, follow the procedure below.

Restoring from backup will delete all current data on the Digital Music Library. If needed, back up any data before continuing.


- 1 Connect the backup drive that contains the backup data to either the Backup or the front USB port on the N1 or to any USB port on the N5.

When the USB drive is connected to the front USB port on the N1 or to any USB port on the N5, the following screen will be displayed. Press the Up/Down buttons and select "Backup or Restore", then press the Menu/Enter button.


If "Finished." is displayed, press the Menu/Enter button.

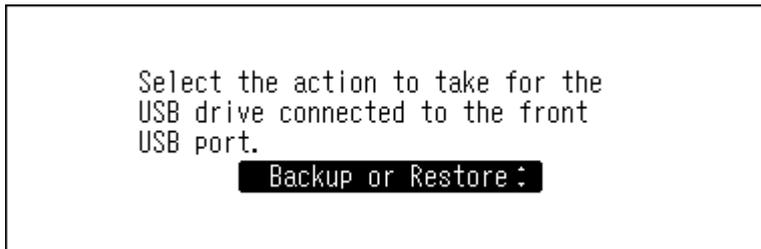


- 2 Press the Menu/Enter button to display the menu list at the home screen.

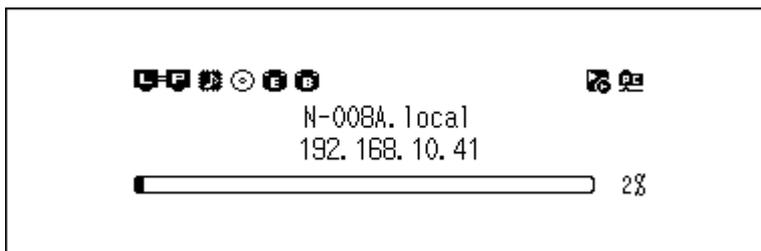

- 3 Press the Up/Down buttons and select "Backup", then press the Menu/Enter button.

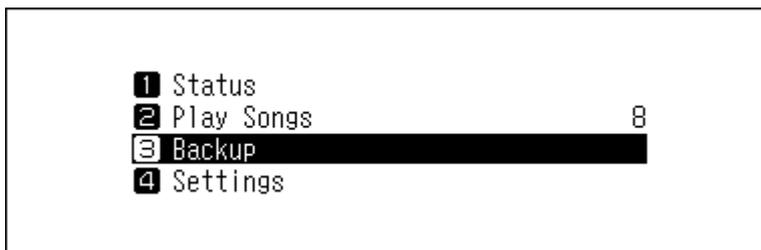


- 4 Press the Up/Down buttons and select "Restore from Backup", then press the Menu/Enter button.

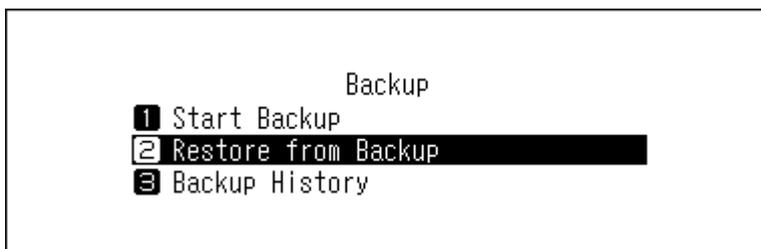


Note: To display the backup history, navigate to *Backup > Backup History*.


5 Press the Up/Down buttons and select the date of backup, then press the Menu/Enter button.

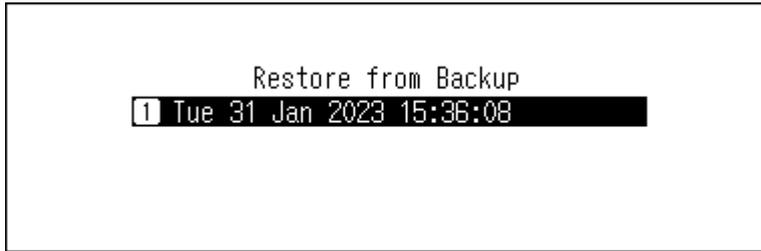


6 Press the Up/Down buttons and select "Restore Data", then press the Menu/Enter button.

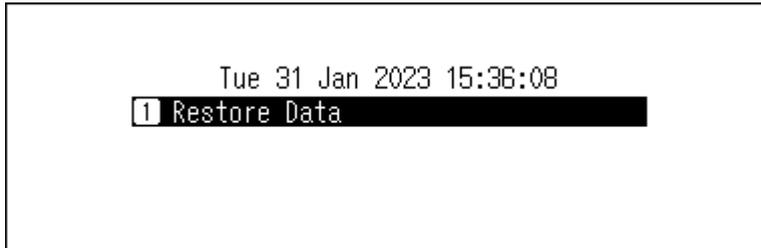


7 Make sure that all files on the drive can be erased before proceeding. To continue formatting, press the Up/Down buttons and select "OK", then press the Menu/Enter button.

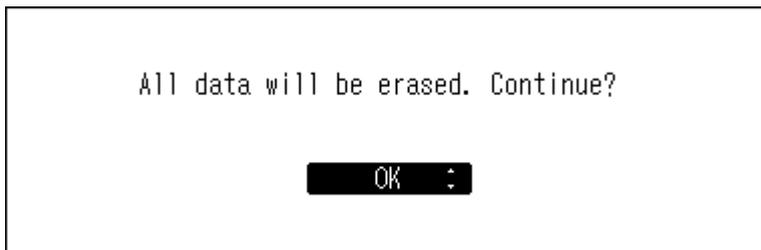

8 Press the Menu/Enter button.

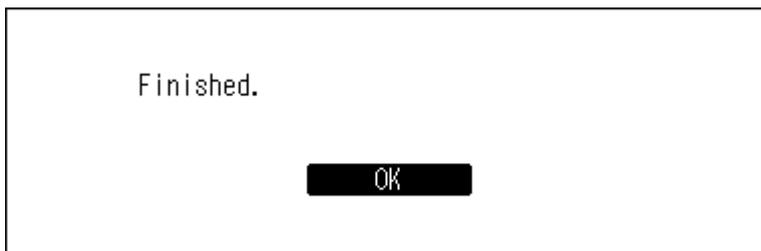

9 Press the Menu/Enter button.

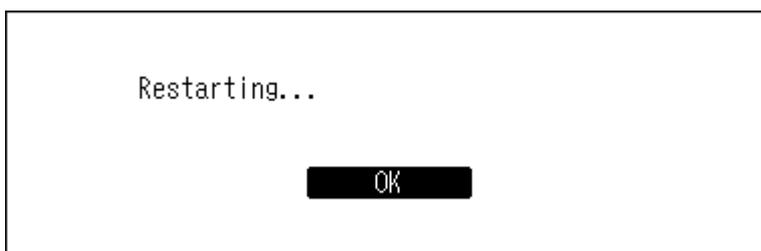

10 The Digital Music Library will restart. Wait until the home screen is displayed.

11 When the home screen is displayed, disconnect the USB drive.

Deleting the Imported Music Files

There are two ways to delete the imported music files. Follow either procedure below.

Deleting All Files

Format the drive, referring the [“Formatting Drives”](#) section in chapter 4. Formatting will delete all data on the drive. If needed, back up any data before continuing.

Deleting Each File One by One

Open the Digital Music Library shared folder from the computer, referring to the [“Confirming Imported Files”](#) section above, and delete each file one by one.

Chapter 4 Advanced Usage

Using a USB Drive as an Expansion Drive

The following operations will be available by connecting a USB drive as an expansion drive, by referring to the procedure within the [“Connecting a USB Drive as an Expansion Drive”](#) section below.

- Importing music files to an expansion drive.
For more information about this operation, refer to the [“Importing Music Files to an Expansion Drive”](#) section below.
- Playing music files from an expansion drive on your Network Audio Player.
For more information about this operation, refer to the [“Streaming Music Files from Expansion Drives”](#) section below.

Notes:

- Use only the compatible USB drives listed on dela.global.
- The expansion drive will appear as the “Expansion” folder on a network .

Connecting a USB Drive as an Expansion Drive

Connect a USB drive to the Expansion port on the N1 or to any USB port on the N5 to use it as an expansion drive. If using the N5, select “Mount and Scan” as the action for the drive.

 will appear when the USB drive is recognized by the Digital Music Library.

Notes:

- Either the rear USB 2.0 or USB 3.0 port on the N5 can be set as the Expansion port until disabled. By setting a USB port as the Expansion port, any USB drive connected to the USB port will be automatically treated as an expansion drive. To set a USB port as the Expansion port, after connecting a USB drive as an expansion drive, press the Menu/Enter button on the home screen and select “Always use USB 2.0/USB 3.0 as Expansion”. For more information about this setting, refer to the [“Always use USB 2.0/USB 3.0 as Expansion”](#) section in chapter 5.
- The Digital Music Library will rescan the music database when the expansion drive is connected to the Digital Music Library. Due to this scanning, the music files on the expansion drive are listed on the Network Audio Player.

Importing Music Files to an Expansion Drive

To import music files to an expansion drive, connect an expansion drive by referring to the [“Connecting a USB Drive as an Expansion Drive”](#) section, and navigate to *Settings > USB-CD Drive*, then select *Expansion Drive*.

Connect only one expansion drive when configuring this setting. If multiple expansion drives are connected, remove all expansion drives first, including the drive on which you want to store imported data, and then re-insert an expansion drive.

Notes:

- If importing from a non-music CD, the imported data will be stored in the Digital Music Library, not in the expansion drive.
- With this setting, the cover art files will not be acquired when importing music files.
- This setting will not affect all expansion drives. You will need to configure this setting for each expansion drive you connect if you want to store imported data on them.

Streaming Music Files from Expansion Drives

Even if music files are not imported from the USB drive, your Network Audio Player can play music files from the expansion drive. Connect an expansion drive to the Digital Music Library by referring to the [“Connecting a USB Drive as an Expansion Drive”](#) section.

From the controller app for the Network Audio Player, select folder view from the index tree, then open the “Expansion” folder of the Digital Music Library. You can then select music files in the “Expansion” folder for playback. If the “Expansion” folder cannot be found, rescan the music database by navigating to *Settings > Music Database > Rescan Songs and Playlists* on the Digital Music Library.

Disconnecting an Expansion Drive

If you want to disconnect the expansion drive while the Digital Music Library is on, press the Menu/Enter button on the home screen and select “Dismount USB Drive” to dismount the expansion drive. The menu name will vary depending on which USB port you have inserted the expansion drive into.


Formatting Drives

To format internal drives in the Digital Music Library or connected USB drives, follow the procedure below.


Formatting will delete all data on the drive. If needed, back up any data before continuing.

Formatting Internal Drives


- 1 Press the Menu/Enter button to display the menu list at the home screen.

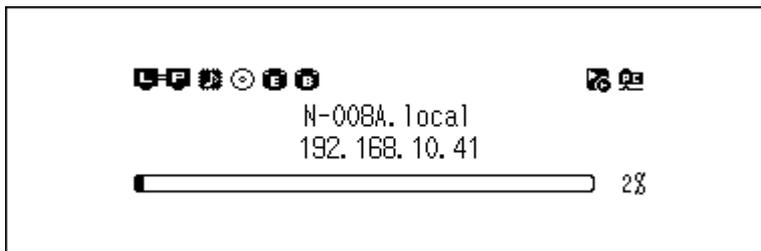


- 2 Press the Up/Down buttons and select “Settings”, then press the Menu/Enter button.

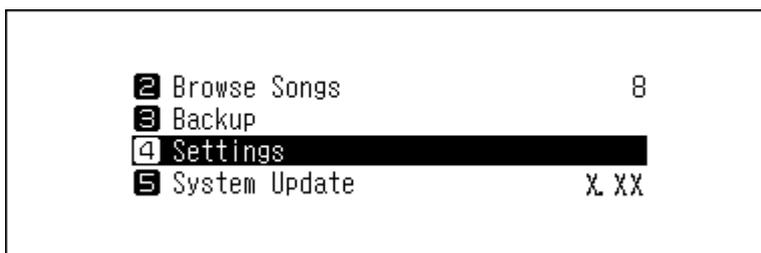


- 3 Press the Up/Down buttons and select “Drive”, then press the Menu/Enter button.

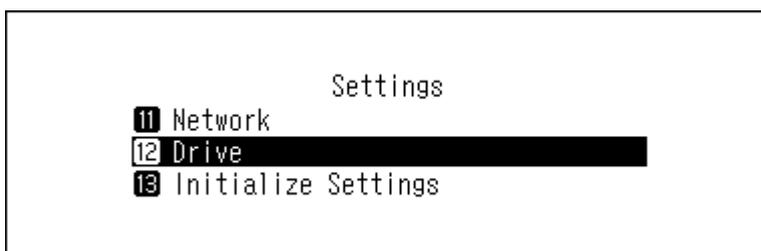


- 4** Press the Up/Down buttons and select “Format Internal Drive”, then press the Menu/Enter button.

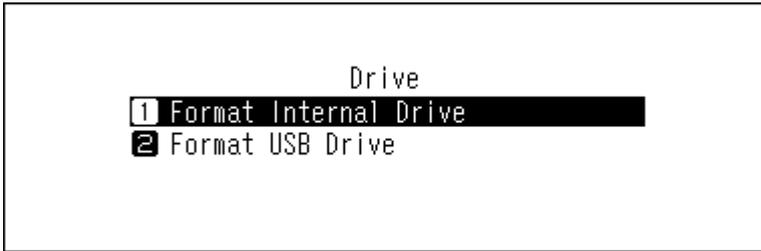

- 5** Press the Up/Down buttons and select “Format”, then press the Menu/Enter button.

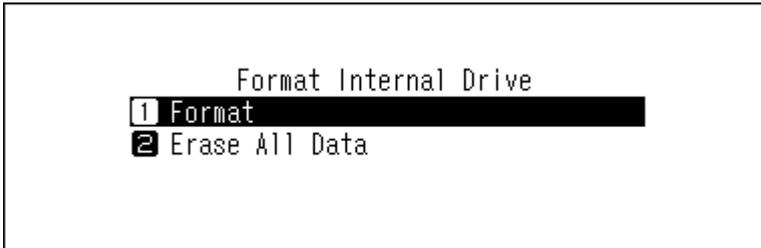


- 6** Make sure that all files on the drive can be erased before proceeding. To continue formatting, press the Up/Down buttons and select “OK”, then press the Menu/Enter button.

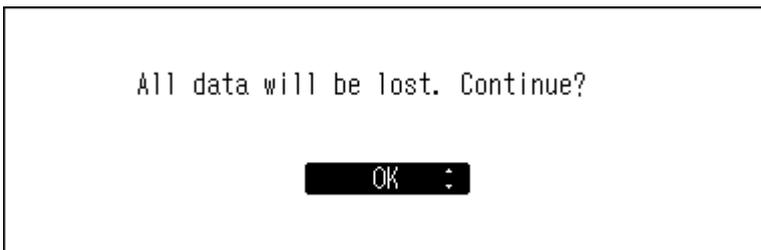

- 7** Press the Menu/Enter button.



Note: If the screen below is displayed, press the Menu/Enter button. The Digital Music Library will restart. Wait until the home screen is displayed.

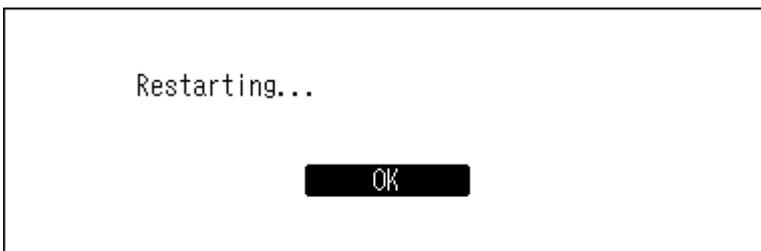


Formatting Connected USB Drives


This will format the USB drive to NTFS. Be aware that a USB drive formatted to NTFS will become read-only when connected to a macOS device.

Note: Connect only one USB drive at a time when formatting it.


- 1 Press the Menu/Enter button to display the menu list at the home screen.

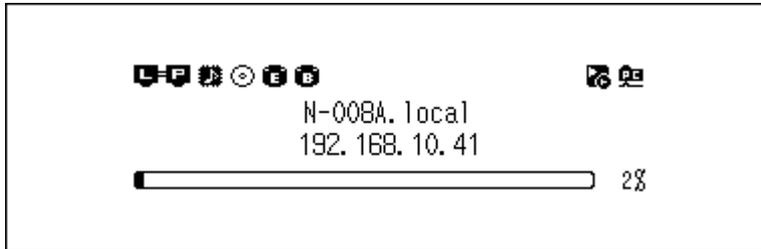


- 2 Press the Up/Down buttons and select "Settings", then press the Menu/Enter button.

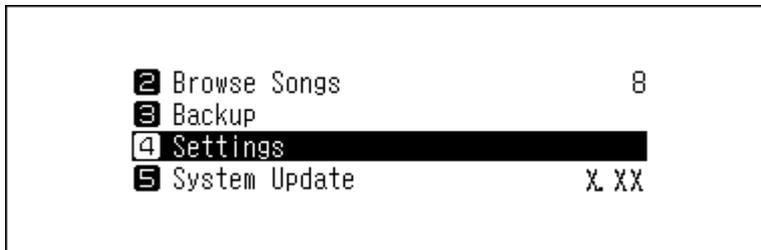


- 3 Press the Up/Down buttons and select "Drive", then press the Menu/Enter button.

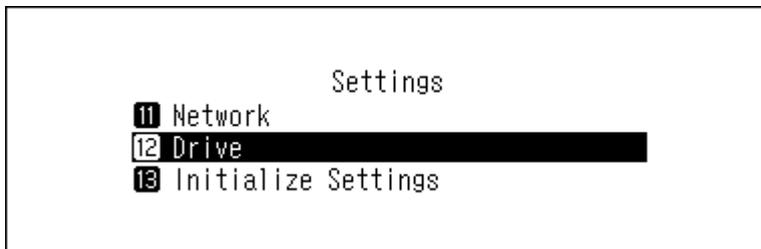

- 4 Press the Up/Down buttons and select "Format USB Drive", then press the Menu/Enter button.

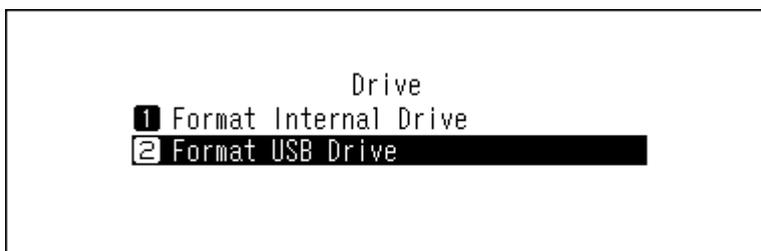


- 5 Press the Up/Down buttons and select "Format", then press the Menu/Enter button.

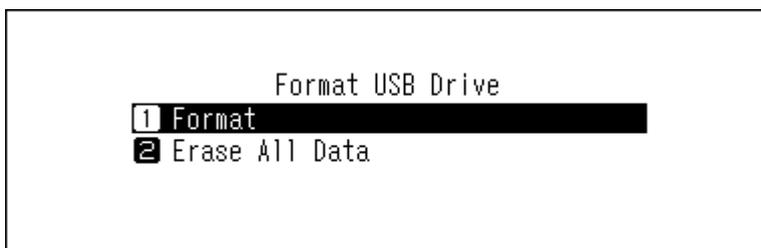


Note: If multiple USB drives are connected to the Digital Music Library and an error message is displayed when formatting a drive, disconnect the drives other than the drive you want to format, and try again.

- 6 Make sure that all files on the drive can be erased before proceeding. To continue formatting, press the Up/Down buttons and select "OK", then press the Menu/Enter button.

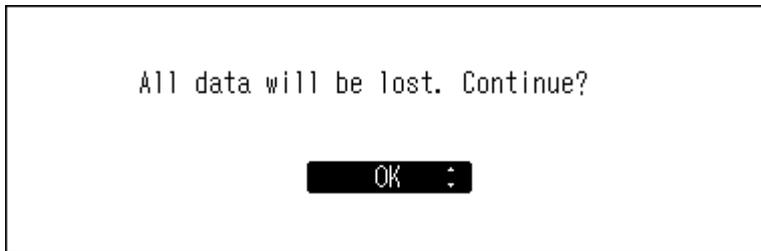

- 7 Press the Menu/Enter button.

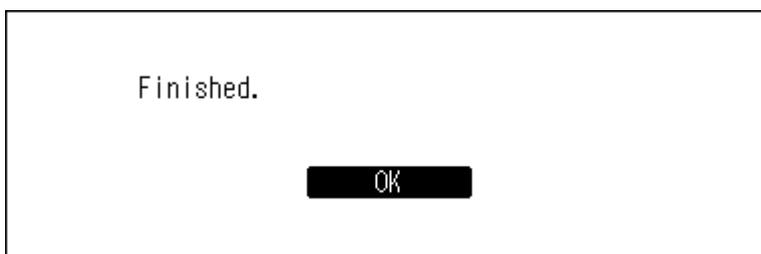

Erasing Data on the Digital Music Library Completely


Under some circumstances, data from formatted drives can be recovered. The drive erasure process mentioned in this section does a much more thorough job of erasing data by removing all data from a drive in a way that makes it nearly impossible to recover with current tools. After completing the procedure, all data on the drive will be completely erased.

This section explains the procedure for erasing data on the internal drive as an example.

Note: This erasure process may take several days to complete. Make sure the Digital Music Library is powered on during the process. Other functions will become unavailable while the erasure process is running.

Typically, follow the procedure in the ["Formatting Internal Drives"](#) section above to delete all data on a drive. This procedure below is not recommended for typical use.


- 1 Press the Menu/Enter button to display the menu list at the home screen.

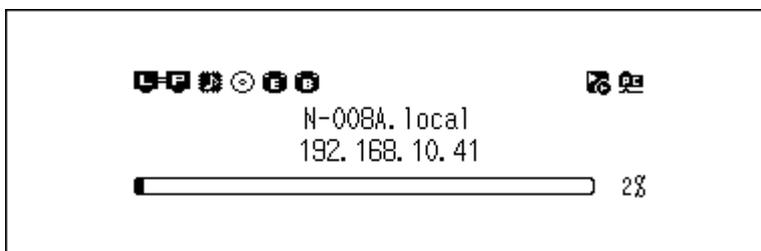


- 2** Press the Up/Down buttons and select “Settings”, then press the Menu/Enter button.




- 3** Press the Up/Down buttons and select “Drive”, then press the Menu/Enter button.

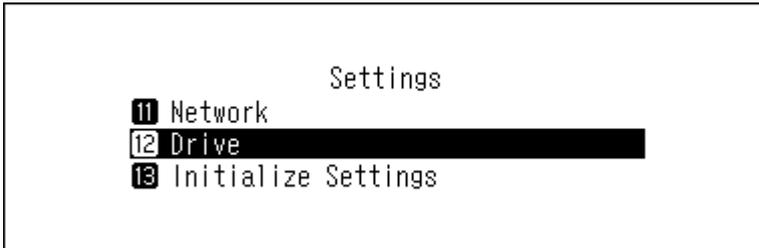


- 4** Press the Up/Down buttons and select “Format Internal Drive”, then press the Menu/Enter button.

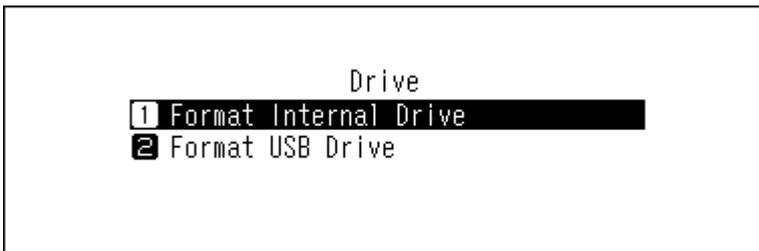


- 5** Press the Up/Down buttons and select “Erase All Data”, then press the Menu/Enter button.

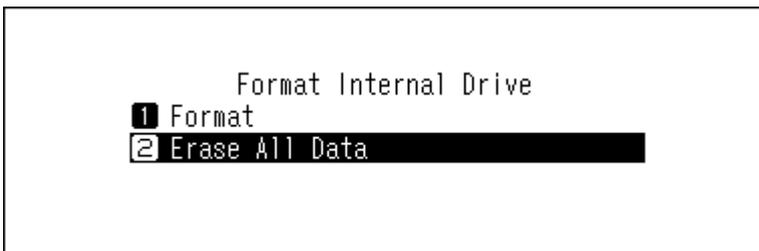

- 6** Make sure that all files on the drive can be erased before proceeding. To continue formatting, press the Up/Down buttons and select “OK”, then press the Menu/Enter button.

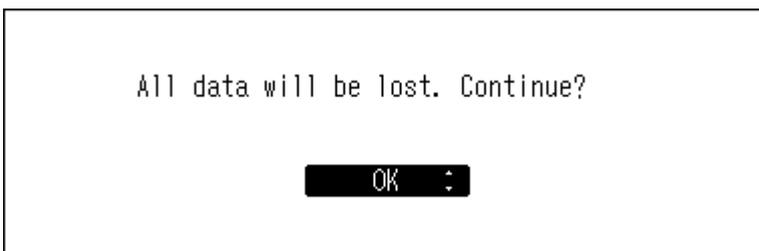


- 7** Press the Menu/Enter button.

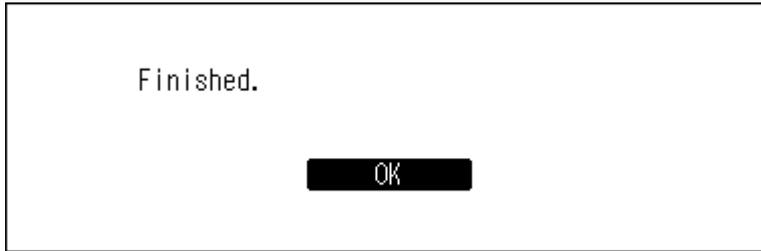

Changing the IP Address

To change the IP address of the Digital Music Library, follow the procedure below. After the procedure is finished, the Digital Music Library will automatically restart and stop any importing or playback operations. We recommend finishing any file importing or playback before changing the Digital Music Library's IP address.


- 1** Press the Menu/Enter button to display the menu list at the home screen.

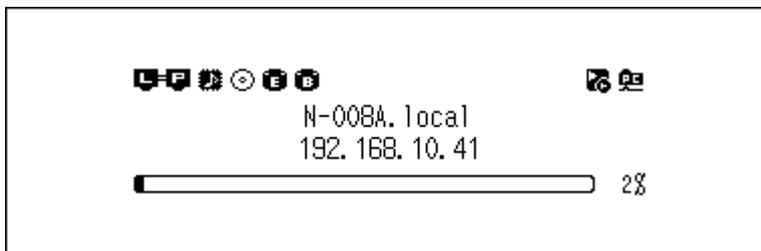


- 2** Press the Up/Down buttons and select "Settings", then press the Menu/Enter button.




- 3** Press the Up/Down buttons and select "Network", then press the Menu/Enter button.

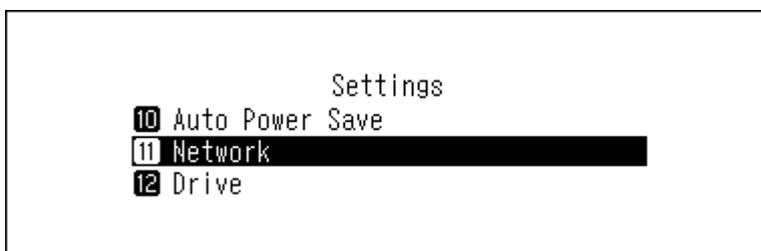


- 4** Press the Up/Down buttons and select “LAN Port”, then press the Menu/Enter button.

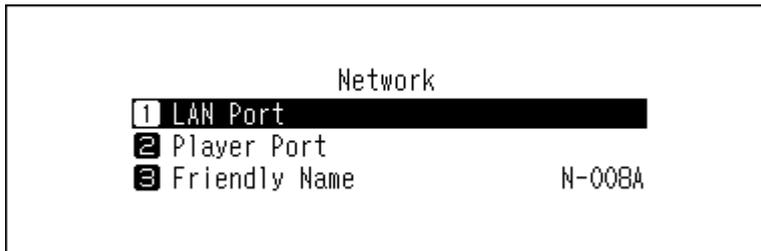

- 5** Press the Up/Down buttons and select whether to automatically acquire the IP address from the DHCP server or configure a fixed IP address, then press the Menu/Enter button.

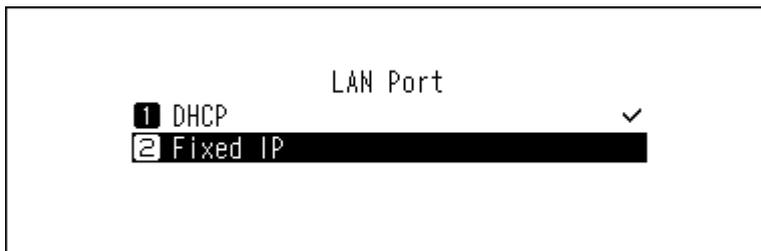

- 6** Press the Menu/Enter button.

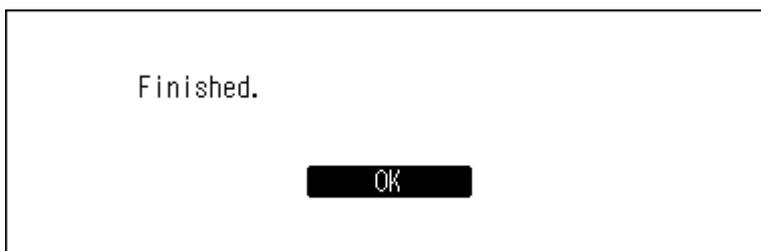


Notes:

- To obtain the IP address from the DHCP server automatically, the DHCP server on the router should also be enabled.
- If “Fixed IP” is selected, enter the desired IP address, subnet mask, default gateway, and DNS server in the displayed screen.

Changing the Friendly Name (Hostname)

To change the friendly name of the Digital Music Library, follow the procedure below. After the procedure is finished, the Digital Music Library needs to be restarted, as well as having any current import or playback operations stopped. We recommend finishing any file importing or playback before changing the friendly name.


- 1** Press the Menu/Enter button to display the menu list at the home screen.

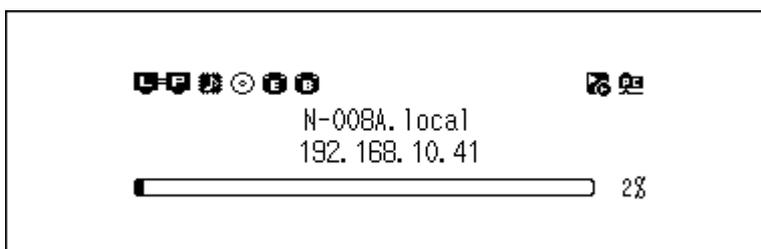


- 2** Press the Up/Down buttons and select “Settings”, then press the Menu/Enter button.




- 3** Press the Up/Down buttons and select “Network”, then press the Menu/Enter button.

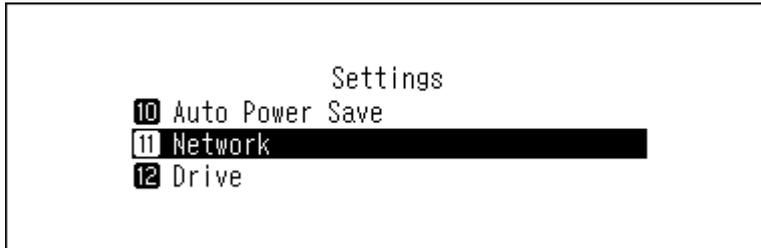


- 4** Press the Up/Down buttons and select “Friendly Name”, then press the Menu/Enter button.

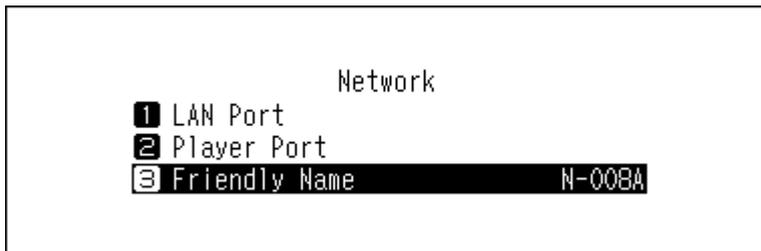


- 5** Press the Up/Down buttons and enter the new friendly name, then press the Menu/Enter button.

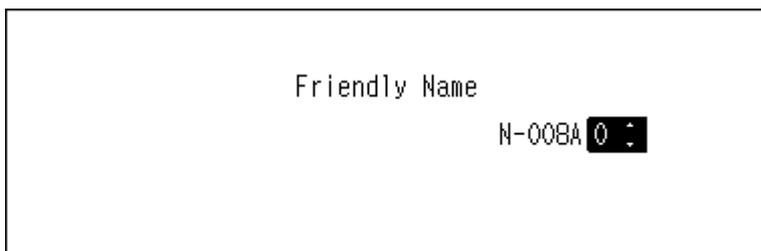

- 6** Press the Menu/Enter button.

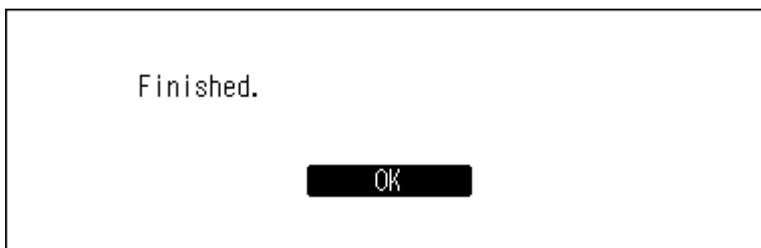

7 Press the Menu/Enter button.

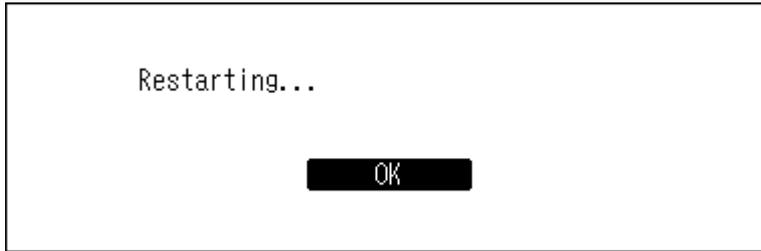

8 The Digital Music Library will restart. Wait until the home screen is displayed.

Notes:


- Friendly name may contain 0–9, A–Z, and hyphens (-).
- When you press the Back button, the entered characters are deleted from the right side. To change the friendly name, press the Back button and delete all characters except for the first, then enter the new friendly name.
- When you press the Menu/Enter button, the entered character is saved and another character can be selected. Press the Menu/Enter button twice to stop configuring the friendly name.
- If you delete all the characters, the display will go back to the previous screen.

Configuring the Date and Time


To configure the time settings, follow the procedure below.

Note: To use features that require an Internet connection such as downloading files from the streaming sites, configure the time settings so that they are automatically acquired from the NTP server.


1 Press the Menu/Enter button to display the menu list at the home screen.

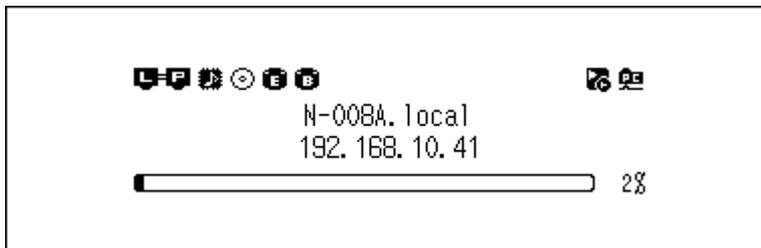


2 Press the Up/Down buttons and select "Settings", then press the Menu/Enter button.

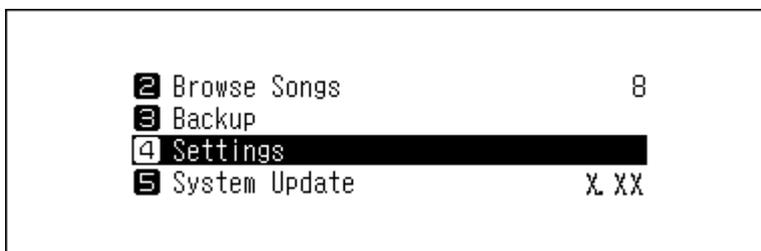

- 3** Press the Up/Down buttons and select “Date and Time”, then press the Menu/Enter button.

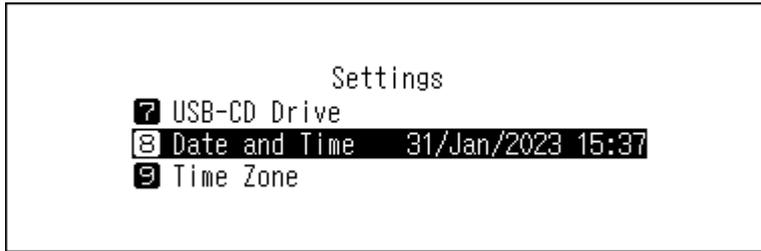


- 4** Press the Up/Down buttons and select whether to automatically acquire time settings from the NTP server or manually configure them, then press the Menu/Enter button.

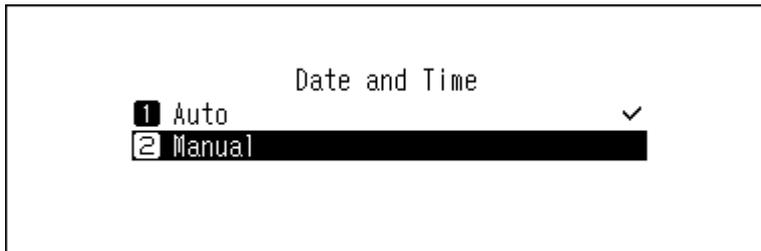

Note: To configure the time settings so that they are acquired from the NTP server, the Digital Music Library should be able to connect the Internet.


- 5** If you have selected “Manual” from the previous step, press the Up/Down buttons and configure the date and time, then press the Menu/Enter button.

- 6** Press the Menu/Enter button.

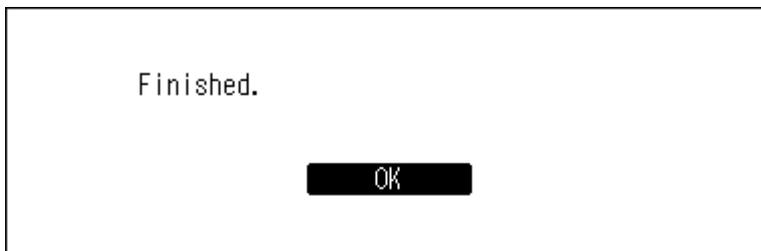

Changing the Time Zone


- 1** Press the Menu/Enter button to display the menu list at the home screen.

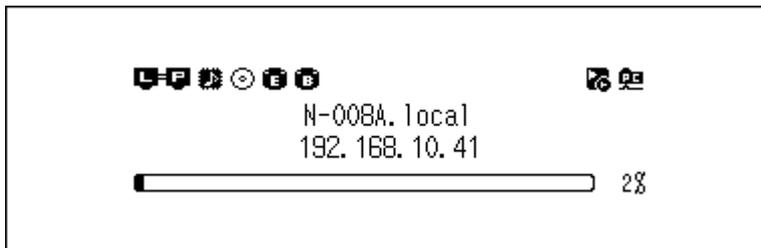


2 Press the Up/Down buttons and select “Settings”, then press the Menu/Enter button.




3 Press the Up/Down buttons and select “Time Zone”, then press the Menu/Enter button.

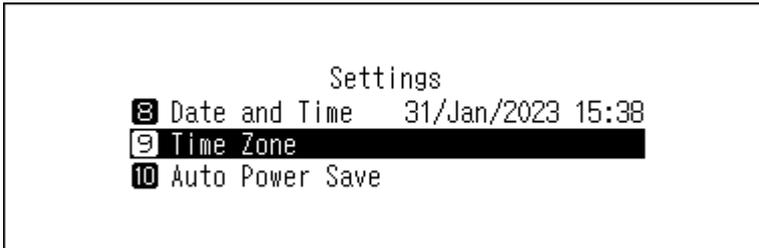

4 Press the Up/Down buttons and select the time zone to configure, then press the Menu/Enter button.

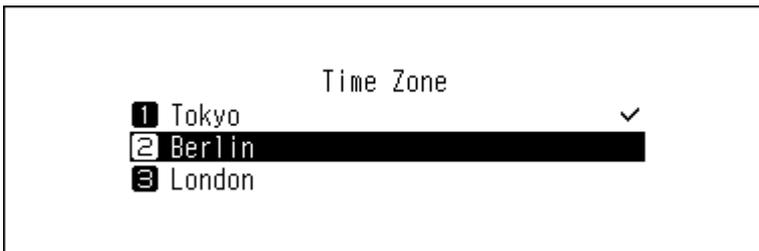


5 Press the Menu/Enter button.

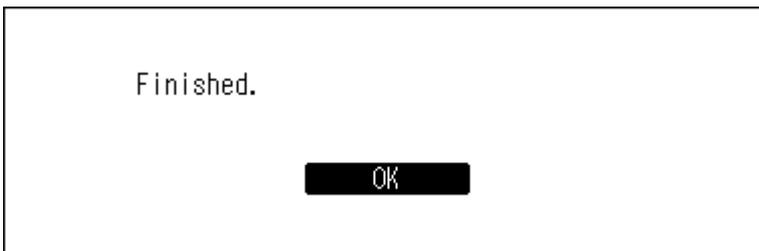


Configuring Display and LED Settings

Changing the Display Brightness


- 1 Press the Menu/Enter button to display the menu list at the home screen.

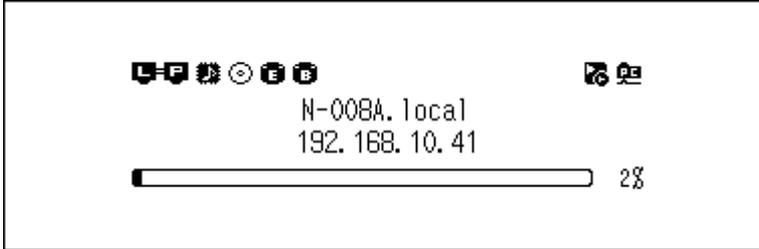


- 2 Press the Up/Down buttons and select "Settings", then press the Menu/Enter button.

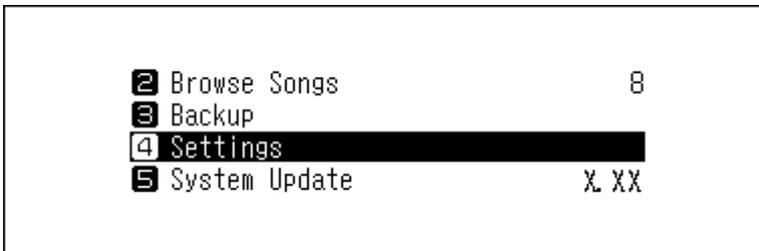

- 3 Press the Up/Down buttons and select "Display", then press the Menu/Enter button.

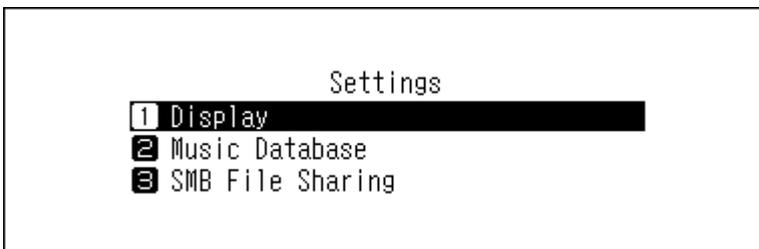

- 4 Press the Up/Down buttons and select "Brightness", then press the Menu/Enter button.

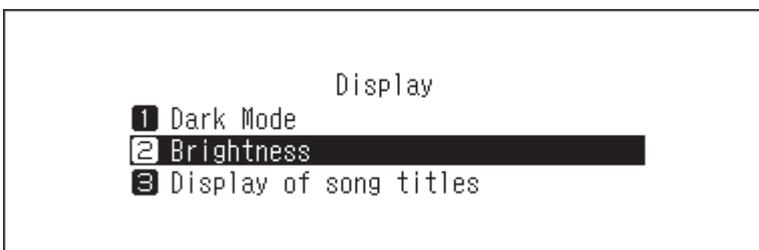


- 5 Press the Up/Down buttons and change the brightness, then press the Menu/Enter button.




Changing the Power LED Brightness


- 1 Press the Menu/Enter button to display the menu list at the home screen.

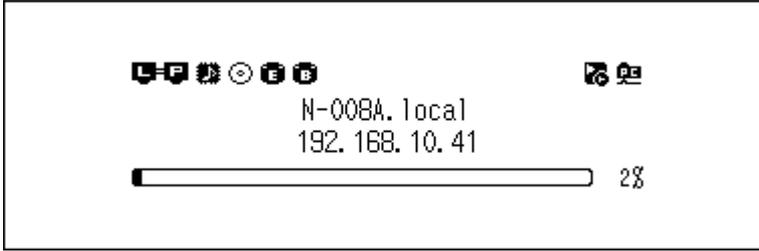

- 2 Press the Up/Down buttons and select "Settings", then press the Menu/Enter button.

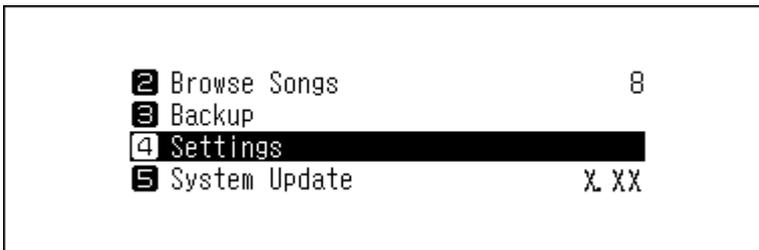


- 3 Press the Up/Down buttons and select "Display", then press the Menu/Enter button.

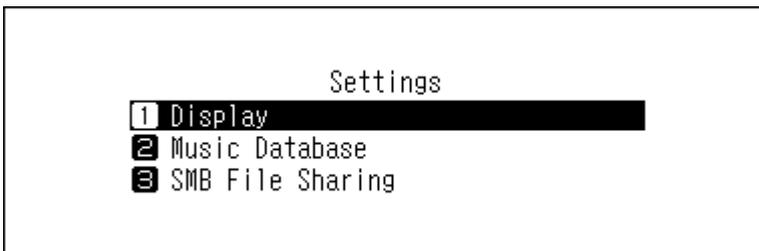


- 4 Press the Up/Down buttons and select "Power LED Brightness", then press the Menu/Enter button.



- 5 Press the Up/Down buttons and select either "Bright", "Dim", or "Extra Dim", then press the Menu/Enter button.

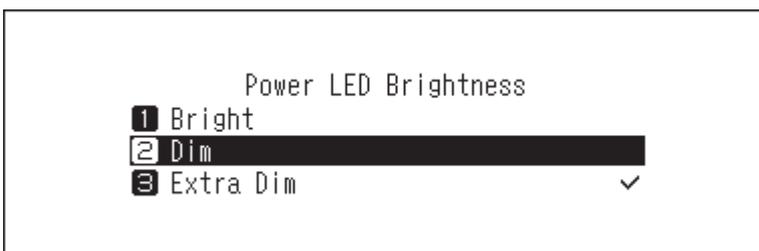

6 Press the Menu/Enter button.

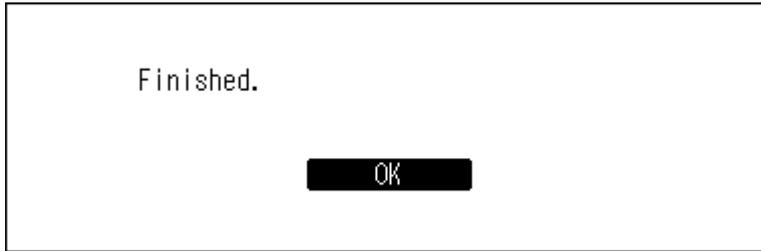


Configuring Automatic Power-Off

If auto power save is enabled, the Digital Music Library will automatically power off after music stops playing and a specific amount of time passes. To change the time settings for auto power save or to disable the feature, follow the procedure below. Auto power save will not shut off the Digital Music Library while the unit is in any of the following situations:

- Connected to a Network Audio Player that is powered on.
- Connected to a USB-DAC device that is powered on.
- Being accessed from a computer.
- Accessing a media server.


1 Press the Menu/Enter button to display the menu list at the home screen.

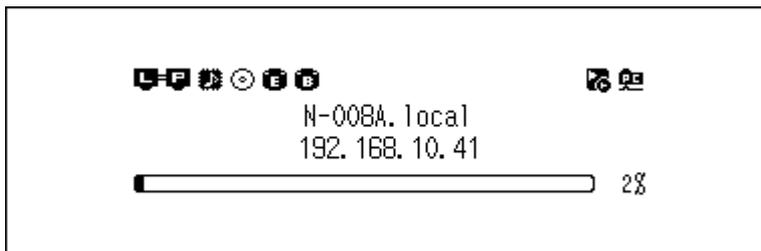


2 Press the Up/Down buttons and select "Settings", then press the Menu/Enter button.




3 Press the Up/Down buttons and select "Auto Power Save", then press the Menu/Enter button.

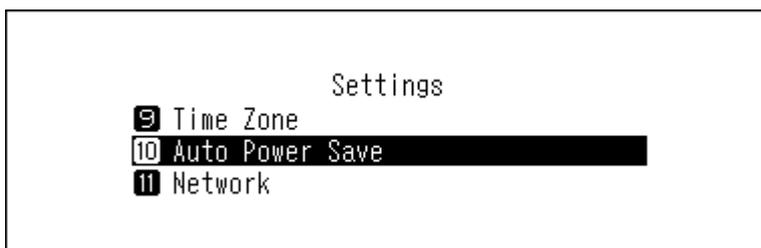

- 4** Press the Up/Down buttons and select the desired time setting, then press the Menu/Enter button.

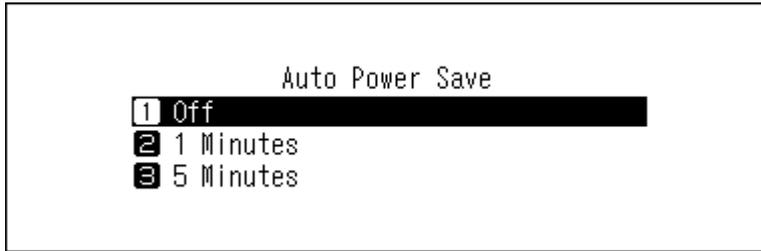


- 5** Press the Menu/Enter button.

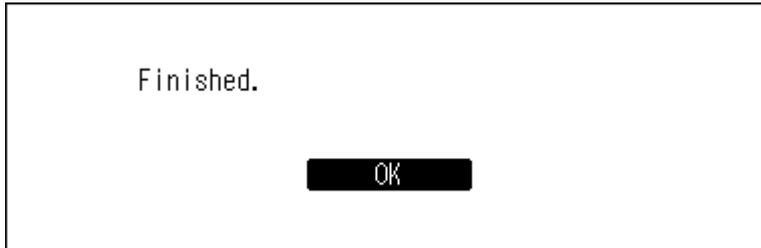


Changing the Display Language

To change the display language, follow the procedure below. After completing the procedure, the Digital Music Library will stop any file playback. We recommend finishing any file playback before changing the display language.


- 1** Press the Menu/Enter button to display the menu list at the home screen.

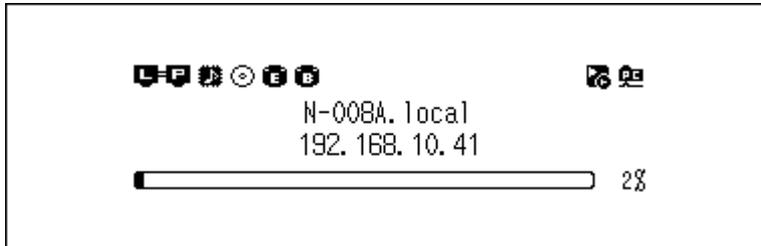

- 2** Press the Up/Down buttons and select "Language", then press the Menu/Enter button.

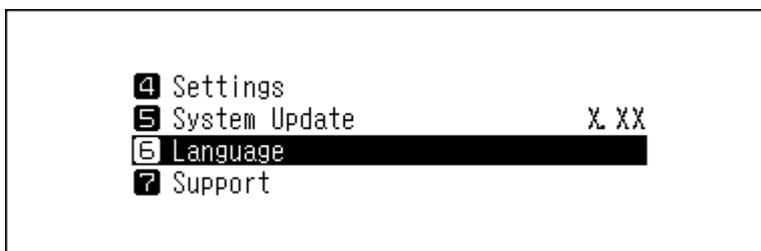

- 3** Press the Up/Down buttons and select the display language, then press the Menu/Enter button.

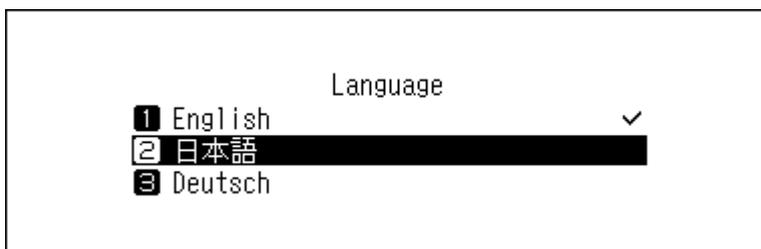


Updating the Firmware

To update the Digital Music Library's firmware version to the latest one, follow the procedure below.


Updating via the Network

Note: To update the firmware via the network, the Digital Music Library should be connected to the Internet.


- 1 Press the Menu/Enter button to display the menu list at the home screen.

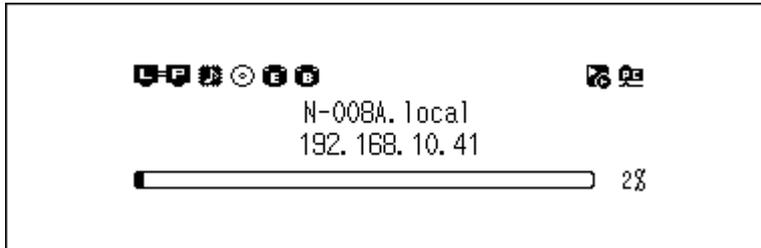


- 2 Press the Up/Down buttons and select "System Update", then press the Menu/Enter button.

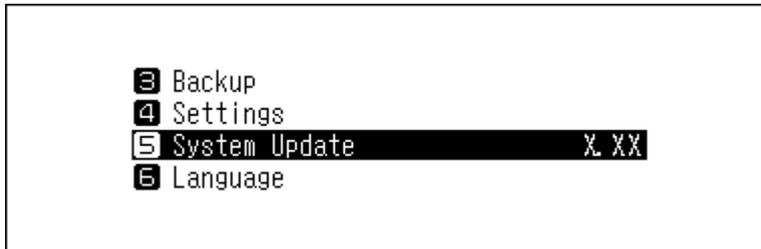

- 3 Press the Up/Down buttons and select "Internet", then press the Menu/Enter button.

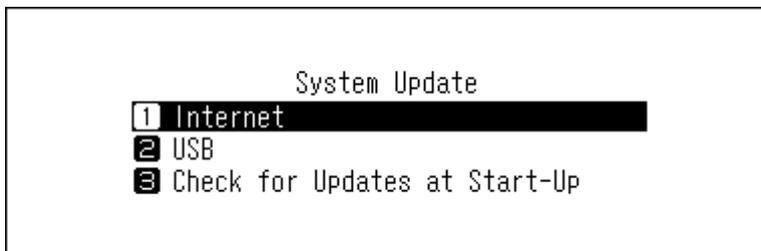

- 4 Press the Menu/Enter button.

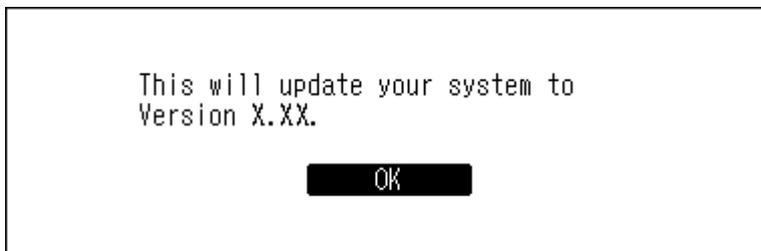


- 5 The Digital Music Library will restart. Wait until the home screen is displayed.


Updating from the USB Device

If you have the firmware update file (as provided by technical support), you can update the Digital Music Library using a USB device by following the procedure below.


- 1 Move the “melco_musictransport_updater.bin” file onto the USB device (root directory).
- 2 Connect the USB device to the front USB port.
The following screen will be displayed. Press the Back button.

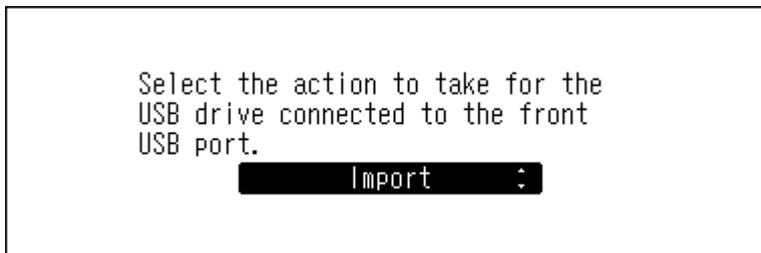


- 3 Press the Menu/Enter button to display the menu list at the home screen.

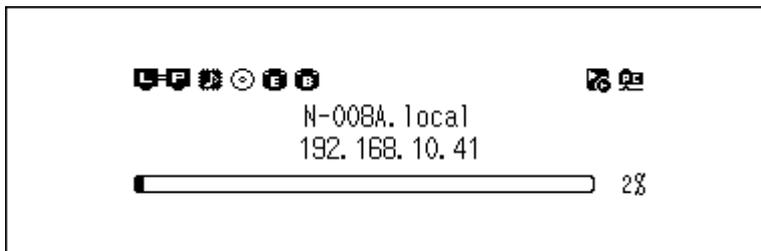


- 4 Press the Up/Down buttons and select “System Update”, then press the Menu/Enter button.

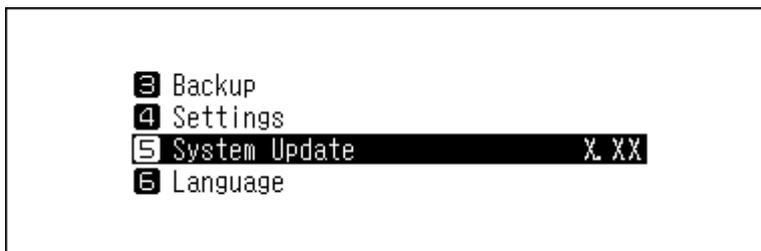

- 5 Press the Up/Down buttons and select “USB”, then press the Menu/Enter button.

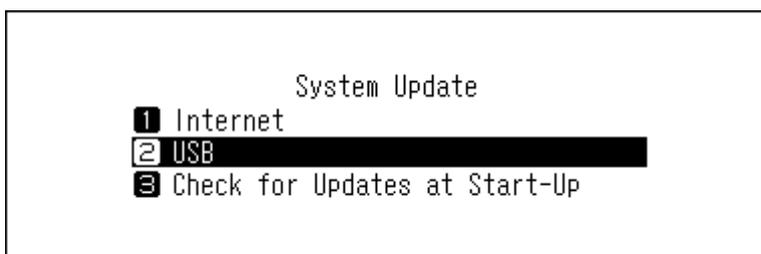

- 6 Press the Menu/Enter button.

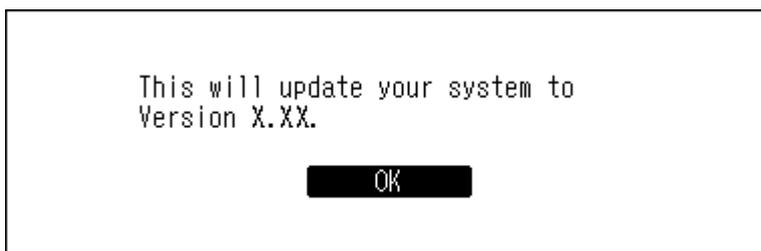


- 7 The Digital Music Library will restart. Wait until the home screen is displayed.

- 8** When the home screen is displayed, disconnect the USB device.


Checking for Updates Automatically

The Digital Music Library is set by default to automatically check for new firmware updates upon startup. If an update is available, you can proceed with the firmware update process. To disable automatic firmware checks, follow the procedure below.


- 1** Press the Menu/Enter button to display the menu list at the home screen.

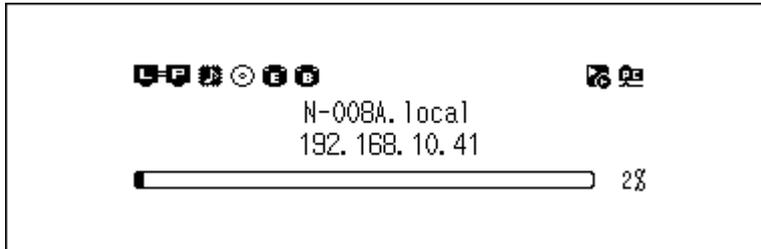


- 2** Press the Up/Down buttons and select "System Update", then press the Menu/Enter button.

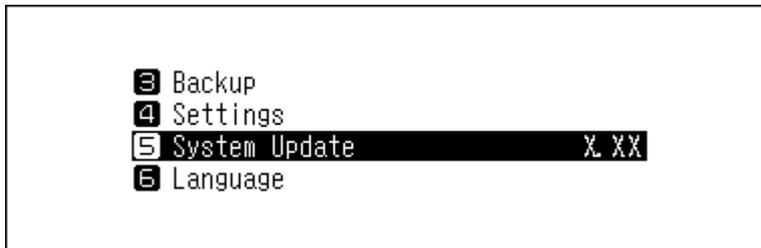


- 3** Press the Up/Down buttons and select "Check for Updates at Start-Up", then press the Menu/Enter button.

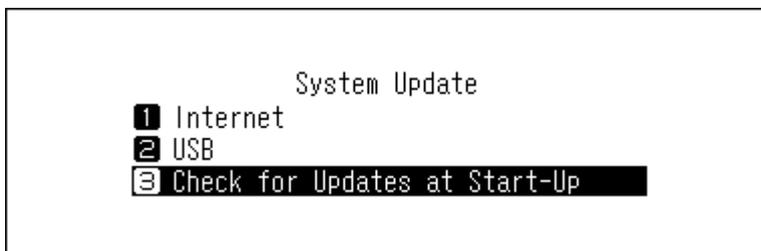

- 4** Press the Up/Down buttons and select "No", then press the Menu/Enter button.

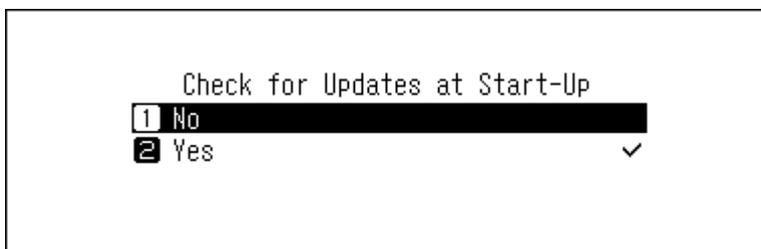


- 5 Press the Menu/Enter button.

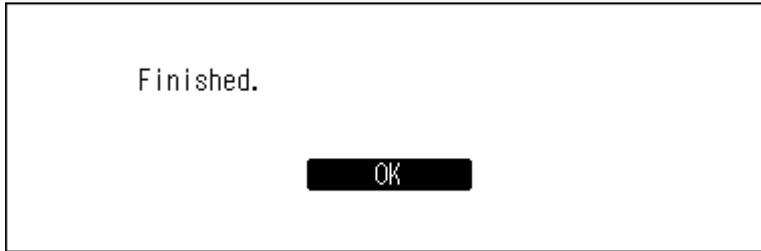


Restoring Factory Defaults

To initialize the Digital Music Library to its factory default settings, follow the procedure below. Completing the procedure below will only initialize the settings. Data will not be affected.

- 1 Turn off the Digital Music Library.
- 2 Turn on the Digital Music Library while pressing and holding the Down button. After the brand logo disappears, let go of the Down button.
- 3 The message, "All settings will be initialized. Continue?" will be displayed. Press the Menu/Enter button.
- 4 Press the Menu/Enter button.

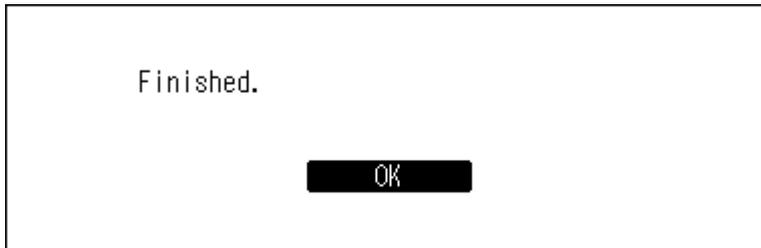

- 5 If the screen below is displayed, press the Menu/Enter button.

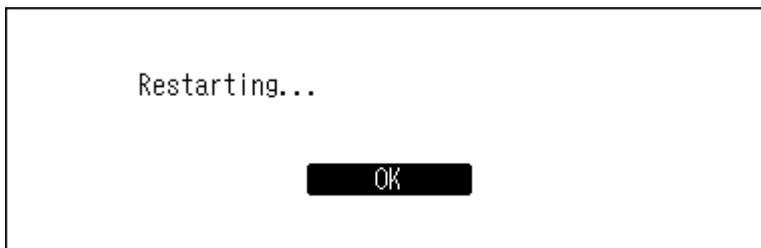

- 6 The Digital Music Library will restart. Wait until the home screen is displayed.
- 7 After the restart process is completed, press the Up/Down buttons and set the display language and time zone, then press the Menu/Enter button.

If you navigate to *Settings > Initialize Settings* on the display panel, you can initialize the settings by selecting "OK", then pressing the Menu/Enter button.



DELA Intelligent Music Library

The Digital Music Library now supports apps that allow you to build your personal intelligent music library. These apps provide richer metadata for your files, and introduce smarter methods to browse your collection with minimal effort. You can install these apps directly onto the Digital Music Library.

SongKong is an application that scans your music collection and adds detailed information to each file as tags. MinimServer is an application that scans and organizes your music collection by utilizing embedded tags on each file.

SongKong for DELA Lite Music Tagger

SongKong is an intelligent music tagger app designed to help you easily organize and manage your digital music collection. By assigning comprehensive tags to each music file, you can resolve common issues such as missing album cover art, duplicate tracks, or unnamed songs. This app allows you to catalogue and organize your music the way you want. By default, the Lite version of SongKong for DELA will be installed. This version of SongKong is provided and supported by JThink. To access the full application, you will need to purchase a Premium License. For more information on full features and purchasing a license, please visit <https://www.jthink.net/songkongfordela>.

How to Install

- 1** From the main menu, navigate to *Settings > Music Database > SongKong*.
- 2** Select "Install SongKong".
- 3** The latest available application version will be displayed. Select "OK".
- 4** Wait a few minutes for installation to finish. When the display shows that SongKong has been successfully installed, select "OK".
- 5** If you now select "Configure SongKong", you can see the URL that you should use to control SongKong. Enter the URL into the web browser of any device on your network.

How to Update

The SongKong application can be updated independently of the Digital Music Library firmware.

- 1** From the main menu, navigate to *Settings > Music Database > SongKong*.
- 2** Select "Version Check".
- 3** The display will show either there are no updates or that a recent update is available. If this is the case, select "OK".

- 4 Wait a few minutes for installation to finish. When the display shows that SongKong update has been successfully installed, select “OK”.
- 5 If you now select “Configure SongKong”, you can see the URL that you should use to control SongKong. Enter the URL into the web browser of any device on your network.

How to Operate

You can operate SongKong using a web browser. Enter “(Digital Music Library’s IP Address):4567” into your web browser to explore through SongKong’s dedicated web user interface.

MinimServer

MinimServer is a UPnP media server application that offers an “intelligent browsing” mechanism so you can easily browse through your music collection using granulated searches. MinimServer is provided and supported by MinimWorld. For more detailed information on its features, visit <https://minimserver.com/melco/>.

How to Install

- 1 From the main menu, navigate to *Settings > Music Database > Media Server App*.
- 2 Select “MinimServer”.
- 3 The version of MinimServer to be installed will be shown.
- 4 Select “OK” to download and install MinimServer.
- 5 Once MinimServer is installed, it will stop TwonkyServer and then perform a full scan of your music library. This scan might take some time.
- 6 When the scan has finished, MinimServer will appear in your UPnP control app.
- 7 You can use your UPnP control app to browse your library and select music for playback.

How to Update

The MinimServer application can be updated independently of the Digital Music Library firmware.

- 1 From the main menu, navigate to *Settings > Music Database > Version Check*.
- 2 If there is a newer version of MinimServer available, it will be shown.
- 3 Select “OK” to download and install the new version.

How to Operate

You can rescan your collection or select index trees from the Digital Music Library the same way you would for TwonkyServer.

You can operate MinimServer using a web browser. Enter “(Digital Music Library’s IP Address):9790” into your web browser to explore MinimServer’s dedicated web user interface. For Windows and Mac, the MinimWatch application also can be used for server maintenance and configuration. Please visit <https://minimserver.com/melco/> for details.

Chapter 5 Appendix

Menu List

From the front display panel, the following options are available.

Status

Internal Drives	Displays the total capacity, used capacity, and usage percentage of the internal drives.
USB Drives	Displays the total capacity, used capacity, and usage percentage of the connected drives.
Songs	Displays the number of imported music files.
Music Database	If the media server app is set to "TwonkyServer", "Scan finished." will be displayed after scanning the music database. If the media server app is set to "MinimServer", the current status of the MinimServer app, such as "Starting", "Running", will be displayed.
Date and Time	Displays the current time and date.
Network	LAN: Displays the network settings of the LAN port labelled "LAN", such as IP address, MAC address, link speed, and the Internet connection status. Player: Displays the network settings of the LAN port labelled "PLAYER", such as IP address, MAC address, and link speed.
System Software	Displays the version of the firmware installed on the Digital Music Library.
Media Server	Displays the current version of the media server.
Downloader	Displays whether downloader is enabled. When downloader is enabled, it will show either the account of a streaming site or the connection status between the streaming site and the Digital Music Library unit.
Font License	Displays the license information for the font that the Digital Music Library is currently using. If you open this information, the "_license" folder, including the document files of the fonts' license terms, will be shown in the shared folder until the next time the Digital Music Library is restarted.

Browse Songs/Play Songs

Displays music lists that have been imported to the Digital Music Library, or are currently on a drive connected to either the Expansion or the front USB port on the N1 or to any USB port on the N5. When you connect a USB-DAC device to the Digital Music Library, the menu will change to "Play Songs". After selecting a music file and then "Play", you can play the music file on a USB-DAC device. If the media server app is set to "TwonkyServer", the number of available music files to play on a USB-DAC device will be displayed to the right of the menu.

Backup

Start Backup	Backs up music files on the Digital Music Library to the backup drive that is connected to either the Backup or the front USB port on the N1 or to any USB port on the N5.
Restore from Backup	Restore Data: Restores the backup music files on the USB drive to the Digital Music Library.

Backup History	Displays the backup history of any previous backups.
----------------	--

Settings

Display

Dark Mode	Turns off the display panel. You can also turn off the display panel from the home screen by pressing and holding the Back button for two seconds. While the display panel is off, press any button on the front to relight the display. If turning off the display panel using this setting, the "Power LED Brightness" setting will become "Extra Dim" automatically even if it had been set to "Bright".
Brightness	Changes the brightness of the display panel.
Display of song titles	Switches the mode of streaming screen between "Simple" mode (default) and "Extended" mode. To check the difference between the modes, refer to the "Streaming Screen" section. If you change the mode while streaming audio, the screen will automatically change when the next music file starts.
Power LED Brightness	Changes the brightness of the power LED at the front.

Music Database

Select the media server app, then configure its settings. The displayed options will differ depending on the app you selected. Refer to the chart below for more information.

Note: For more details about MinimServer and SongKong, refer to the ["DELA Intelligent Music Library"](#) section.

If Using TwonkyServer (Default)

Media Server App	TwonkyServer: Check for the latest version of TwonkyServer. MinimServer: You can change the media server app to MinimServer. If the MinimServer app isn't already installed, "Install MinimServer" will be displayed. Execute it to install MinimServer. After the app is installed, the "Install MinimServer" option will no longer appear.
Rescan Songs and Playlists	Rescans the music database of the imported music files. If the music files are not listed properly on the Network Audio Player, update the music database.
Tree Indexes	Customizes navigation trees. Standard: This is the default setting when shipped. Indexed Mode: This is the best option for when there are many files on the Digital Music Library or playing music files via mobile devices or a USB-DAC device using the front panel of the Digital Music Library. Artist, album, and composer information will be hidden. Standard + Indexes: All index folders and all artist, album, and composer information will be displayed.
Integrate Duplicate Files	If enabled, and files that have the same title, artist, size, and format information are found, these files are considered to be the same file so only one file will appear on the file list. If disabled, even files that are considered exactly the same will appear on the file list, so you may see multiple files with the same song title.
Clear and Rebuild Database	Rebuilds the music database of the imported music files.

SongKong	<p>Execute “Install SongKong” to install SongKong music tagger. After installing, the settings below will be displayed here.</p> <p>SongKong Service: Enable or disable SongKong. Configure SongKong: The URL of the configuration page for SongKong will be displayed. Access the URL to configure the SongKong app’s settings. Version Check: Displays the current version of SongKong. Select it to check for the latest updates.</p>
Factory Reset	Reset the settings for the media server app. If TwonkyServer does not appear in your controller app, this may solve the issue.

If Using MinimServer

Media Server App	<p>TwonkyServer: You can change the media server app to TwonkyServer. MinimServer: Check for the latest version of MinimServer.</p>
Rescan Songs and Playlists	Rescans the music database of the imported music files. After importing new music files, select this to update the music database. If the music database is not updated using this option, newly-imported music files will not be added to the music database, and will not be listed on the Network Audio Player.
Tree Indexes	<p>Customizes navigation trees.</p> <p>For Classical Music: The indexes will be optimized for classical music. “Conductor” and “Ensemble” folders will be displayed. For Jazz Music: The indexes will be optimized for jazz music. A “Performer” folder will be displayed. For Rock/Pop Music: This setting is for rock or pop music. Default/Generic: This is the default setting when shipped.</p>
Configure MinimServer	The URL for the configuration page for MinimServer will be displayed. Access the URL to configure the MinimServer app’s settings.
Version Check	Displays the current version of MinimServer. Select it to check for the latest updates.
SongKong	<p>Execute “Install SongKong” to install SongKong music tagger. After installing, the settings below will be displayed here.</p> <p>SongKong Service: Enable or disable SongKong. Configure SongKong: The URL of the configuration page for SongKong will be displayed. Access the URL to configure the SongKong app’s settings. Version Check: Displays the current version of SongKong. Select it to check for the latest updates.</p>
Factory Reset	Reset the settings for the media server app. If MinimServer does not appear in your controller app, this may solve the issue. If you select this option, the media server app will be set to TwonkyServer, which is the default. If you want to use MinimServer, navigate to <i>Settings > Music Database > Media Server App</i> , then select “MinimServer”.

SMB File Sharing

On	Shares all music files on the Digital Music Library with the network. For files in the “import_CD” folder, tracks can be shared but not the cover art file (folder.jpg).
Off	If disabled, the Digital Music Library will become invisible from other devices on the network and music files on the Digital Music Library cannot be accessed by another device.

Share Folder Notification	If you select "Off", the Digital Music Library will become invisible on "Network" of Windows Explorer.
---------------------------	--

Downloader

Enable or disable periodic downloads, and add or remove a streaming site account for downloading music files.

Account Settings	Adds, edits, or removes a streaming site account for the downloader. Currently, the Digital Music Library supports accounts from HIGHRESAUDIO, Qobuz, OTOTOY, and mora. After adding the account, music files purchased at the streaming site will be downloaded to the Digital Music Library automatically.
Periodic Downloads	Enables or disables periodic downloads.

Import from USB Drive

Configure whether to create a folder that contains the import date in the folder name when importing.

Into One Folder	Imports all updated files to the "all" folder within the "import" folder on the Digital Music Library. If a file has no updated information, that file will not be imported.
Into Folders by Date	Creates a folder within the "import" folder to store the imported files from the connected USB drive. The folder name will contain the import date. Imported files may contain duplicates in the Digital Music Library if the same files are on the USB drive.

USB-DAC

Configure settings to convert DSD files using a USB-DAC device.

Controller Mode	Configures the mode to stream music using controller apps.
DSD Playback Mode	Configures the playback mode if playing DSD files on the Digital Music Library using a USB-DAC device. If playing DSD files without converting them, select "Standard". This mode will select the playback mode between Markerless DSD playback or DoP (DSD over PCM) playback for the DSD files automatically. Use this mode normally. If you prefer the DoP playback, select "DSD over PCM Priority Mode". If the connected USB-DAC device only supports PCM, select "PCM Mode".
Precision Start Latency	Configures a gap time that precedes a playlist track. This also solves an issue that occurs with specific USB-DAC devices.

USB-CD Drive

Configure settings to import music files from a music CD using an optical drive.

CD-DA Import File Format	<p>Selects import file formats from either “FLAC” or “WAV”. If you select “FLAC”, configure the compression level used when importing music files as well. Available compression levels are below.</p> <p>No Compression: The music files will not be compressed during importing.</p> <p>Low Compression: Compression time is less than standard compression. The resulting file quality corresponds to FLAC 0.</p> <p>Standard Compression: Compression time is not as long and the size remains average. This is the same as common FLAC file format. The resulting file quality corresponds to FLAC 5.</p> <p>High Compression: Compression time is longer but the resulting file size is smaller. The resulting file quality corresponds to FLAC 8.</p>
Maximum Read Count	Configures the number of times a CD will be read when inserted into the Digital Music Library.
Advanced Drive Optimization	Configures the read sample offset correction values between “-2000” to “+2000”. This value will vary depending on what type of CD drive you use. It is configured to “±0” by default. This doesn’t need to be changed normally.
Gracenote Coverart	Configures whether to acquire the cover art files when importing music files.
Expansion Drive	<p>This menu appears when connecting an expansion drive.</p> <p>If this menu is selected, music files will be saved directly onto the expansion drive when they are imported. You can configure the expansion drive by referring to the “Importing Music Files to an Expansion Drive” section in chapter 4.</p> <p>This setting does not affect subsequent expansion drives. If you want to save the imported music files onto another expansion drive, you will need to configure the drive once it is connected by following the same procedure above.</p>

Date and Time

Configure the time settings of the Digital Music Library.

Auto	Configures the time settings acquired from the NTP server via the Internet.
Manual	Configures the time settings manually.

Time Zone

Configure the time zone for date and time settings.

Auto Power Save

Configure whether to shut down the Digital Music Library automatically if the music stops playing and a specific amount of time passes. You can select from 1 minute, 5 minutes, 15 minutes, and 20 minutes. Alternatively, select “Off” to disable this feature.

Notes:

- The Digital Music Library will not be powered down while playing music.
- If the Digital Music Library is accessed from a Network Audio Player or computer, it will not be powered down even after the specified time passes.

Network

LAN Port	Configures whether to automatically acquire the IP address from a DHCP server or enter it manually. If “Fixed IP” is selected, enter the IP address, subnet mask, default gateway, and DNS server.
Player Port	If you select “Off”, the Player port will be disabled.

Friendly Name	Changes the friendly name (hostname) of the Digital Music Library.
---------------	--

Drive

Format Internal Drive	Formats the internal drives of the Digital Music Library. If you select "Erase All Data", all data on the drives will be completely erased. Data removed this way will be nearly impossible to recover with current tools.
Format USB Drive	Formats the USB drive. If you select "Erase All Data", all data on the drives will be completely erased. Data removed this way will be nearly impossible to recover with current tools.

Initialize Settings

Restores the Digital Music Library settings to the factory default.

Dismount USB Drive

Select this menu before disconnecting an expansion drive. This menu will show which USB port an expansion drive is connected to (either front or rear), and allows you to disconnect an expansion drive while the Digital Music Library is on.

Always use USB 2.0/USB 3.0 as Expansion

This menu appears when connecting an expansion drive to the rear USB 2.0 or USB 3.0 port of the N5. Select this option to set the occupied USB port on the N5 as the Expansion port until disabled. By setting the USB port as the Expansion port, any USB drive connected to the USB port will be automatically recognized as an expansion drive.

Notes:

- Either the rear USB 2.0 port or the USB 3.0 port on the N5 can be set as an Expansion port at one time.
- To disable this setting, set the other rear USB port as an Expansion port. This will cause the first USB port to revert to its default setting.
- To disable settings for both rear USB ports, initialize the Digital Music Library to its factory default settings.

System Update

Internet	Updates the Digital Music Library's firmware to the latest version via the Internet. Refer to the " Updating via the Network " section in chapter 4 for the procedure to update the firmware.
USB	Updates the Digital Music Library's firmware to the latest version using a USB device that contains the firmware file. Refer to the " Updating from the USB Device " section in chapter 4 for the procedure to update the firmware.
Check for Updates at Start-Up	Enables or disables checking for a new firmware release when turning on the Digital Music Library.

Language

English	Changes the display language to English.
日本語	Changes the display language to Japanese.
Deutsch	Changes the display language to German.
Français	Changes the display language to French.

Support

This menu is used for user assistance.

Web Service Availability	Displays the connection availability for services that will require the Internet.
PC-incompatible characters	If invalid characters are used for the names of files and folders, they will be automatically changed to underscores (_).
WebRemote	WebRemote allows you to remotely operate the Digital Music Library from a web browser with the exception of formatting drives. To enable WebRemote, select "On", then enter the Digital Music Library's IP address into the address bar of a web browser and press the Enter key.
Internal Drive Check	Checks the file system being used for the internal drive of the Digital Music Library.
Create Archive	Analyzes the Digital Music Library's operating environment and archives the data to a file with the ".sendme" file extension. The archived file will be saved into the shared folder on the Digital Music Library. In the event that you contact us for support, we may ask you to submit your archived file for diagnostic purposes. We recommend not creating archives during playback.

Error Codes

If any of the following error codes are displayed on the Digital Music Library's display panel, try the respective corrective actions.

Error	Corrective Actions
010–012 No backup found.	Make sure the USB drive that contains backup data is connected to either the Backup or the front USB port on the N1 or to any USB port on the N5.
020 Friendly name is too short.	The friendly name has not been configured. Enter the friendly name. The friendly name should be between 1–15 characters.
021 Friendly name is too long.	The entered friendly name must not exceed 15 characters.
030 Not enough space on drive.	Delete extra files on the copy target drive.
031 Some files not copied.	Files on the copy source drive may be corrupted.
033 I/O error.	The connected USB drive may be malfunctioning. Connect it to a computer and run a drive check.
034 Could not erase data.	The drive to be formatted may be malfunctioning.
040, 041 Updater not found.	Make sure the Digital Music Library is connected to the Internet or the updater is saved on the connected USB drive.
042–044 Update error.	The updater file may be corrupted. Try the update again, or download a new updater file from dela.global .
094 No response from NTP server.	Put the Digital Music Library on a network that can access the Internet.
101 Could not mount drive.	The USB drive may be malfunctioning or the drive format is not supported.
102 Could not dismount drive.	The USB drive is possibly being accessed at this time.

Error	Corrective Actions
103 Could not format drive.	The formatted USB drive may be malfunctioning.
104 Could not form partition.	The drive may be malfunctioning or is not supported.
110 Internal drive not found.	Try restarting the Digital Music Library. If the message is still displayed, contact our technical support for assistance.
111 Usable internal drive not found.	Run "Try to repair" that will be displayed with this error message.
112 Internal drive not found.	Try restarting the Digital Music Library. If the message is still displayed, contact our technical support for assistance.
113 Internal drive 1 not found.	
120 USB drive not found.	The connected USB drive may be malfunctioning. Try another USB drive.
121 USB drive not mounted.	
140 No backup drive found.	Make sure the backup drive that contains backup data is connected to either the Backup or the front USB port on the N1 or to any USB port on the N5.
141 Backup drive not mounted.	
200 No accounts found.	Add an account.
203 Could not connect to the site.	Put the Digital Music Library on a network that can access the Internet.
204 Authentication error.	Make sure that the username and password are correct.

Default Settings

Display	Brightest
SMB File Sharing	On
Power LED Brightness	Bright
Periodic Downloads	Off
Import from USB Drive	Into One Folder
Controller Mode	Hybrid Mode
DSD Playback Mode	Standard
Precision Start Latency	3 seconds
CD-DA Import File Format	WAV
Maximum Read Count	1
Advanced Drive Optimization	±0
Auto Power Save	15 minutes Note: This setting may be configured to "Off" for some units.
LAN Port	DHCP
Player Port	Off
Friendly Name	N-XXXX ("XXXX" is the last four digits of the MAC address)
Check for Updates at Start-Up	Yes