
THE PRACTICALLY PERFECT REL

T/7x



T/7x is the perfect answer for the real world. It's compact enough (and beautiful enough) to end arguments before they begin; while powerful enough to easily answer most needs and balanced enough to blend beautifully with many of the quality speakers out there and still flexible enough to work in specialty applications.

Many don't realize the intense connection between performance and design here at REL. Performance is everything to us and it leads to physical design solutions. Using gently rounded corner radii that allows the eye to flow over and see less visual mass. The result is both modern and clean with no unnecessary adornment.

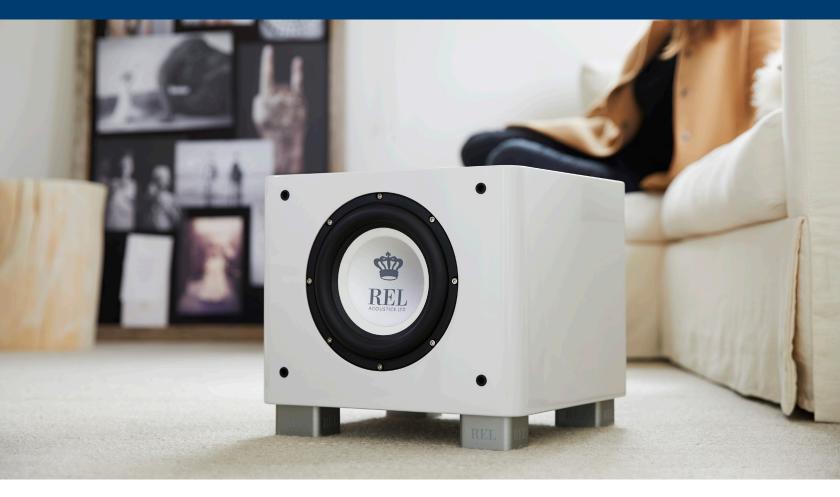

SPECIFICATIONS

TYPE	Front-firing active woofer, down-firing passive radiator	POWER OUTPUT	200 watts (RMS)
ACTIVE DRIVER SIZE & MATERIAL	8 in. Fibre Alloy™, 200mm long-throw, inverted alloy dust cap, steel chassis	AMPLIFIER TYPE	Class A/B
PASSIVE RADIATOR SIZE & MATERIAL	10 in., 254mm long throw, inverted dust cap	WIRELESS CAPABILITY	Yes- REL Arrow system [required], sold separately
LOW FREQUENCY EXTENSION	31Hz at -6 dB	WxHxD, INCLUDING FEET & REAR PANEL CONTROLS	14.0 x 12.6 x 14.3 in., (356 x 320 x 363 mm)
INPUT CONNECTORS	Hi Level Neutrik Speakon, Low Level phono, LFE phono	NET WEIGHT	38.5 lbs. (17.5 kg)
OUTPUT CONNECTORS	N/A	FINISH	High Gloss Black, High Gloss White, 5 coats

All RELs - Fully Electronic SET-SAFE, output short, DC Fault